



1 x 9290020691 8.5W E27 2700K

1 x 806 lm


Polar intensity diagram



Quantity estimation diagram

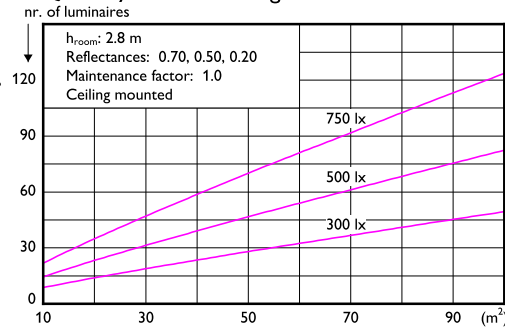

UGR diagram

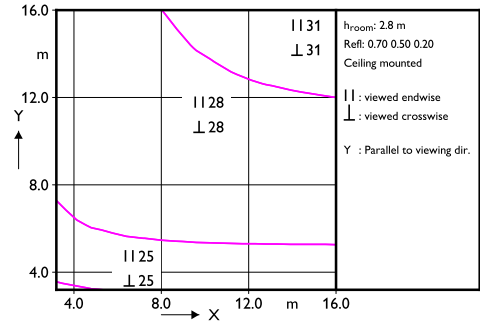

Light output ratio 1.00
Service upward 0.26
Service downward 0.74

CIE flux code 32 60 82 74 100

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.38	0.36	0.36	0.36	0.35	0.27	0.25	0.20	0.23	0.19	0.15	0.15
1.00	0.48	0.45	0.45	0.44	0.43	0.35	0.32	0.27	0.29	0.25	0.20	0.20
1.25	0.56	0.52	0.53	0.51	0.49	0.41	0.38	0.33	0.35	0.30	0.25	0.25
1.50	0.63	0.58	0.60	0.58	0.55	0.48	0.44	0.38	0.40	0.35	0.29	0.29
2.00	0.79	0.71	0.74	0.71	0.67	0.61	0.56	0.51	0.51	0.47	0.39	0.39
2.50	0.85	0.75	0.80	0.76	0.72	0.66	0.61	0.56	0.55	0.52	0.44	0.44
3.00	0.90	0.79	0.85	0.80	0.76	0.70	0.64	0.60	0.59	0.55	0.47	0.47
4.00	0.97	0.84	0.91	0.85	0.80	0.75	0.69	0.66	0.63	0.60	0.52	0.52
5.00	1.01	0.87	0.95	0.89	0.83	0.79	0.72	0.69	0.66	0.64	0.55	0.55

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	26203	24042	22857	22479	22857	24042	26203
50.0	25620	23302	22048	21650	22048	23302	25620
55.0	25069	22593	21272	20856	21272	22593	25069
60.0	24579	21937	20549	20114	20549	21937	24579
65.0	24160	21338	19879	19426	19879	21338	24160
70.0	23846	20819	19281	18807	19281	20819	23846
75.0	23696	20422	18790	18291	18790	20422	23696
80.0	23736	20154	18408	17879	18408	20154	23736
85.0	24059	20071	18177	17610	18177	20071	24059
90.0	24771	20225	18134	17516	18134	20225	24771

(cd/m²)

2019-04-23