



1 x 9290030956 6W 6500K

1 x 620 lm


Polar intensity diagram



Quantity estimation diagram

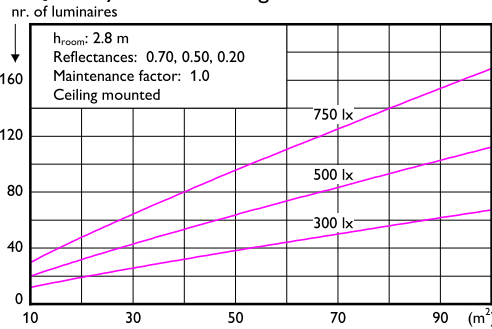

UGR diagram

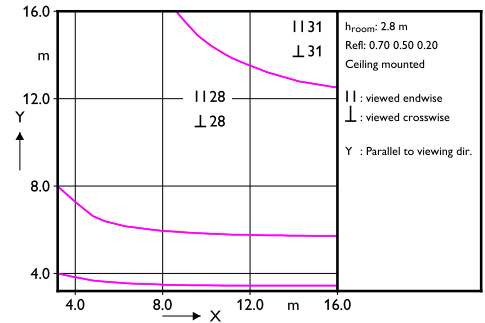

Light output ratio 1.00
Service upward 0.36
Service downward 0.64

CIE flux code 29 55 79 64 100

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.37	0.35	0.35	0.34	0.33	0.26	0.23	0.18	0.20	0.16	0.12	0.12
0.80	0.46	0.43	0.43	0.42	0.41	0.33	0.29	0.24	0.26	0.21	0.16	0.16
1.00	0.54	0.50	0.50	0.48	0.47	0.39	0.34	0.29	0.30	0.26	0.20	0.20
1.25	0.61	0.56	0.57	0.55	0.53	0.45	0.40	0.35	0.35	0.31	0.23	0.23
1.50	0.67	0.61	0.62	0.60	0.57	0.50	0.44	0.39	0.39	0.35	0.27	0.27
2.00	0.76	0.68	0.71	0.67	0.64	0.57	0.51	0.46	0.45	0.41	0.32	0.32
2.50	0.83	0.73	0.77	0.73	0.69	0.63	0.56	0.51	0.49	0.46	0.36	0.36
3.00	0.87	0.77	0.81	0.76	0.72	0.67	0.59	0.55	0.52	0.49	0.39	0.39
4.00	0.94	0.81	0.87	0.82	0.77	0.72	0.64	0.61	0.57	0.54	0.43	0.43
5.00	0.98	0.84	0.91	0.85	0.80	0.76	0.67	0.64	0.60	0.57	0.46	0.46

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	26228	23781	22464	22047	22464	23781	26228
50.0	25887	23264	21872	21434	21872	23264	25887
55.0	25644	22838	21368	20909	21368	22838	25644
60.0	25557	22547	20993	20511	20993	22547	25557
65.0	25546	22315	20671	20165	20671	22315	25546
70.0	25760	22263	20513	19977	20513	22263	25760
75.0	26119	22312	20440	19871	20440	22312	26119
80.0	26776	22578	20553	19943	20553	22578	26776
85.0	27771	23072	20854	20192	20854	23072	27771
90.0	29111	23769	21311	20585	21311	23769	29111

(cd/m²)

2021-05-13