



1 x 9290024914 5.5W 2200K-2700K

1 x 470 lm


Polar intensity diagram



Quantity estimation diagram

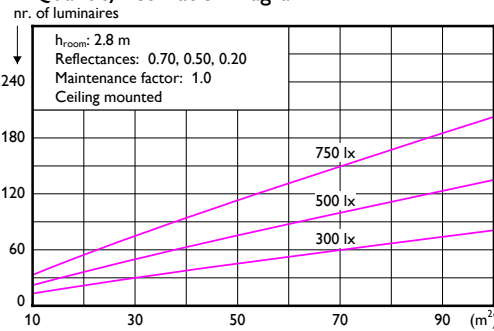

UGR diagram

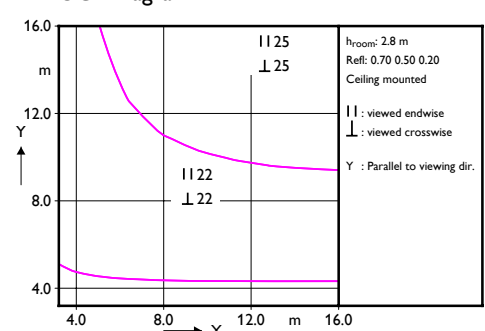

Light output ratio 1.00
Service upward 0.28
Service downward 0.72

CIE flux code 45 68 86 72 100

UGRcen (4Hx8H, 0.25H) 23

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.44	0.42	0.43	0.42	0.41	0.34	0.32	0.27	0.29	0.26	0.22	0.22
0.80	0.54	0.50	0.51	0.50	0.48	0.41	0.38	0.34	0.35	0.31	0.27	0.27
1.00	0.61	0.57	0.58	0.56	0.54	0.47	0.44	0.39	0.40	0.36	0.31	0.31
1.25	0.69	0.63	0.65	0.62	0.60	0.53	0.49	0.44	0.45	0.41	0.35	0.35
1.50	0.74	0.67	0.70	0.67	0.64	0.58	0.53	0.49	0.49	0.45	0.39	0.39
2.00	0.83	0.74	0.78	0.75	0.71	0.65	0.60	0.56	0.55	0.51	0.44	0.44
2.50	0.89	0.79	0.84	0.79	0.75	0.70	0.64	0.61	0.59	0.56	0.48	0.48
3.00	0.94	0.82	0.88	0.83	0.79	0.74	0.68	0.64	0.62	0.59	0.51	0.51
4.00	1.00	0.86	0.94	0.88	0.83	0.79	0.72	0.69	0.66	0.64	0.55	0.55
5.00	1.04	0.89	0.97	0.91	0.85	0.82	0.75	0.72	0.69	0.66	0.57	0.57

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	10352	9024	8350	8143	8350	9024	10352
50.0	9467	8190	7550	7354	7550	8190	9467
55.0	8631	7413	6809	6625	6809	7413	8631
60.0	8012	6834	6256	6081	6256	6834	8012
65.0	7536	6384	5824	5655	5824	6384	7536
70.0	7240	6091	5539	5372	5539	6091	7240
75.0	6579	5497	4981	4827	4981	5497	6579
80.0	6131	5085	4593	4446	4593	5085	6131
85.0	6055	4984	4486	4338	4486	4984	6055
90.0	5759	4702	4216	4072	4216	4702	5759

(cd/m²)

2021-06-23