



1 x 9290030121 2200-2700K 2.5W

1 x 340 lm


Polar intensity diagram



Quantity estimation diagram

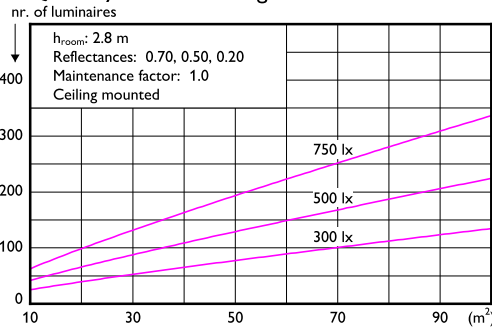

UGR diagram

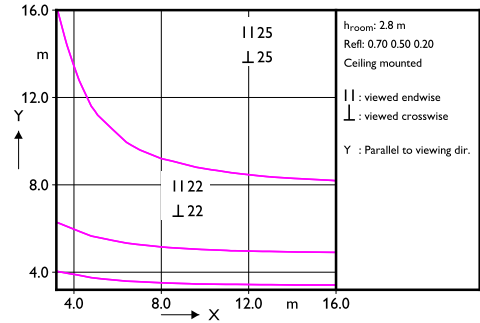

Light output ratio 1.01
Service upward 0.48
Service downward 0.53

CIE flux code 14 38 68 52 101

UGRcen (4Hx8H, 0.25H) 23

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.32	0.31	0.29	0.29	0.28	0.20	0.17	0.12	0.13	0.10	0.04	0.04
1.00	0.41	0.39	0.37	0.36	0.35	0.27	0.22	0.17	0.18	0.14	0.07	0.07
1.25	0.48	0.45	0.44	0.42	0.41	0.33	0.27	0.22	0.22	0.17	0.09	0.09
1.50	0.56	0.51	0.51	0.49	0.47	0.39	0.32	0.27	0.26	0.21	0.12	0.12
2.00	0.62	0.56	0.56	0.54	0.51	0.43	0.36	0.31	0.29	0.25	0.15	0.15
2.50	0.71	0.63	0.64	0.61	0.58	0.51	0.43	0.37	0.35	0.31	0.19	0.19
3.00	0.77	0.68	0.70	0.66	0.63	0.56	0.47	0.42	0.39	0.35	0.23	0.23
4.00	0.82	0.72	0.74	0.70	0.66	0.60	0.51	0.46	0.42	0.38	0.25	0.25
5.00	0.89	0.77	0.81	0.76	0.71	0.66	0.56	0.52	0.46	0.43	0.29	0.29
5.00	0.94	0.80	0.85	0.79	0.74	0.70	0.59	0.56	0.49	0.46	0.32	0.32

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	3612	3338	3186	3137	3186	3338	3612
50.0	4132	3786	3596	3536	3596	3786	4132
55.0	4623	4197	3967	3894	3967	4197	4623
60.0	5171	4649	4371	4284	4371	4649	5171
65.0	5790	5150	4815	4711	4815	5150	5790
70.0	6454	5672	5271	5147	5271	5672	6454
75.0	7172	6218	5738	5591	5738	6218	7172
80.0	8021	6843	6264	6089	6264	6843	8021
85.0	9065	7585	6879	6667	6879	7585	9065
90.0	10414	8503	7624	7364	7624	8503	10414

(cd/m²)

2021-07-01