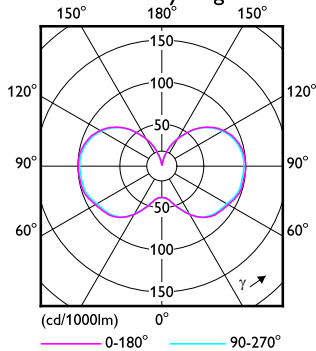
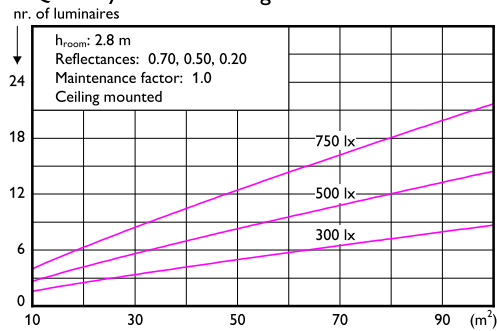


1 x 36CC/LED/840 929002395900**1 x 5200 lm****Polar intensity diagram**

Light output ratio 1.00
 Service upward 0.46
 Service downward 0.54


CIE flux code 18 43 71 54 100

UGRcen (4Hx8H, 0.25H) 26

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.50	0.30	0.20	0.10	0.10	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.49	0.46	0.45	0.43	0.42	0.34	0.29	0.23	0.23	0.19	0.12	0.06
1.00	0.57	0.52	0.52	0.50	0.48	0.40	0.34	0.28	0.28	0.23	0.15	0.09
1.25	0.62	0.57	0.57	0.55	0.52	0.45	0.38	0.33	0.31	0.27	0.17	0.12
1.50	0.71	0.64	0.65	0.62	0.59	0.52	0.44	0.39	0.37	0.33	0.22	0.15
2.00	0.78	0.69	0.71	0.67	0.64	0.57	0.49	0.44	0.41	0.37	0.25	0.17
2.50	0.83	0.72	0.75	0.71	0.67	0.61	0.52	0.48	0.44	0.40	0.28	0.19
3.00	0.89	0.77	0.81	0.76	0.72	0.67	0.57	0.53	0.48	0.45	0.32	0.22
4.00	0.94	0.81	0.85	0.80	0.75	0.70	0.60	0.57	0.51	0.48	0.35	0.25
5.00												

Ceiling mounted

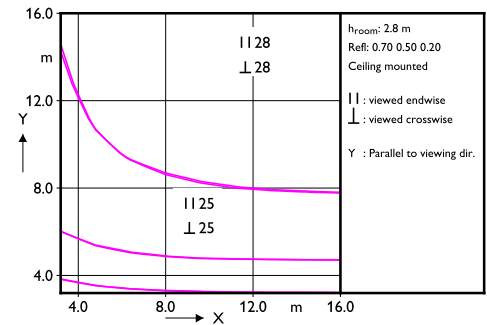UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	10589	9845	9392	9361	9575	9882	10414
50.0	11370	10506	9995	9960	10178	10586	11230
55.0	12260	11224	10600	10560	10846	11310	12051
60.0	13429	12192	11413	11346	11659	12230	13138
65.0	14914	13391	12480	12362	12726	13423	14623
70.0	16787	14849	13729	13616	14062	14908	16436
75.0	18845	16413	15007	14903	15454	16540	18457
80.0	21393	18339	16581	16448	17150	18454	20991
85.0	25051	20890	18681	18496	19342	21114	24558
90.0	30290	24544	21637	21331	22377	24798	29767

(cd/m²)

2019-12-20