



1 x 929002406700

1 x 5000 lm


Polar intensity diagram



Quantity estimation diagram

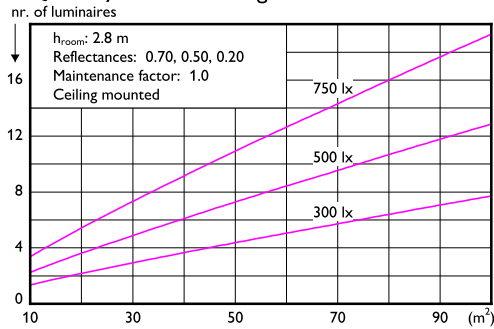

UGR diagram

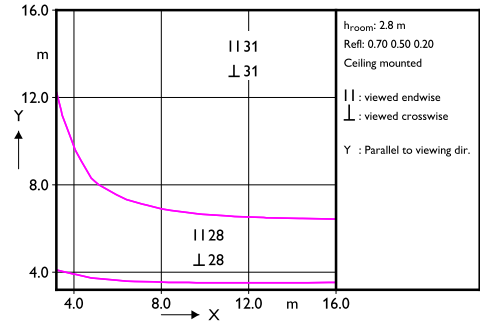

Light output ratio 1.00
Service upward 0.19
Service downward 0.81

CIE flux code 34 62 84 81 100

UGRcen (4Hx8H, 0.25H) 30

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	46134	42277	40166	39493	40166	42277	46134
50.0	44742	40642	38429	37728	38429	40642	44742
55.0	43297	38971	36668	35943	36668	38971	43297
60.0	41751	37217	34839	34096	34839	37217	41751
65.0	40060	35339	32902	32146	32902	35339	40060
70.0	38415	33502	31009	30242	31009	33502	38415
75.0	36726	31621	29080	28304	29080	31621	36726
80.0	35071	29755	27167	26384	27167	29755	35071
85.0	33805	28189	25523	24726	25523	28189	33805
90.0	32861	26831	24056	23236	24056	26831	32861

(cd/m²)

2020-05-21