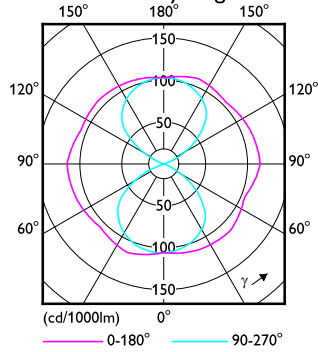



1 x TForce LED SON-T 929003468100

1 x 5400 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.50
 Service downward 0.50

CIE flux code 32 59 81 50 100

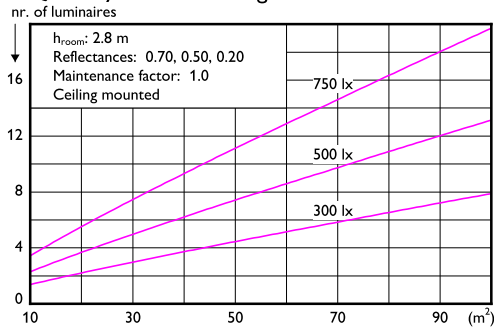Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	35654	34025	32451	31070	29968	29001	31736
50.0	35206	33555	32122	30194	27562	24908	27023
55.0	35025	33239	31618	29383	24962	20125	20937
60.0	35107	33172	31365	28703	22259	15206	14463
65.0	35467	33434	31419	28188	19770	10626	7503
70.0	36882	34482	31839	27967	17838	6223	1731
75.0	39491	36754	33704	28242	16164	2972	1206
80.0	42698	39577	36104	29517	15522	1393	796
85.0	46668	43089	39171	31562	15423	1385	559
90.0	51651	47532	43152	34772	16482	1518	600

(cd/m²)

2021-12-14