



1 x 9290023117 14W 2700K

1 x 1500 lm


Polar intensity diagram



Quantity estimation diagram

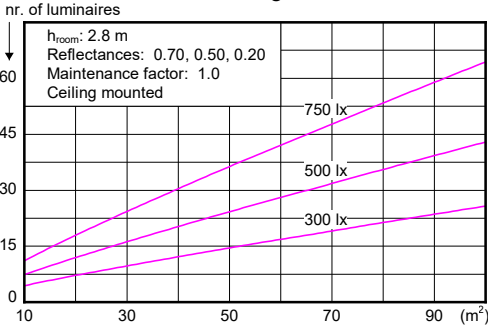

UGR diagram

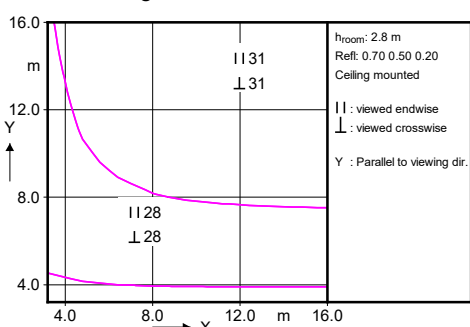

Light output ratio 1.00
Service upward 0.22
Service downward 0.78

CIE flux code 36 63 84 78 100

UGRcen (4Hx8H, 0.25H) 29

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
0.80	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
1.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
1.25	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
1.50	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
2.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
2.50	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
3.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
4.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
5.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00

Ceiling mounted

Luminance Table

Plane	0.0	15.0	30.0	45.0	60.0	75.0	90.0
Cone	47353	42964	40599	39850	40599	42964	47353
45.0	44714	40211	37817	37064	37817	40211	44714
50.0	42282	37680	35267	34513	35267	37680	42282
55.0	40256	35538	33099	32342	33099	35538	40256
60.0	38444	33601	31136	30376	31136	33601	38444
65.0	36671	31710	29225	28464	29225	31710	36671
70.0	35275	30148	27624	26857	27624	30148	35275
75.0	34252	28892	26305	25525	26305	28892	34252
80.0	33436	27785	25116	24320	25116	27785	33436
85.0	33053	26988	24197	23372	24197	26988	33053
90.0							

(cd/m²)