



1 x 9290023113 9W 2700K

1 x 800 lm


Polar intensity diagram



Quantity estimation diagram

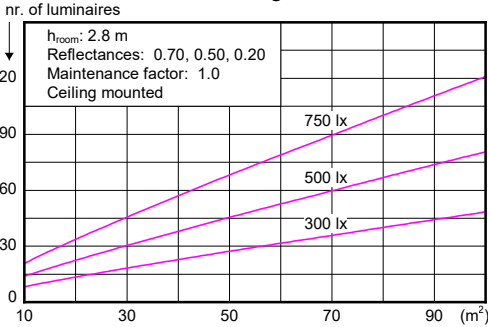

UGR diagram

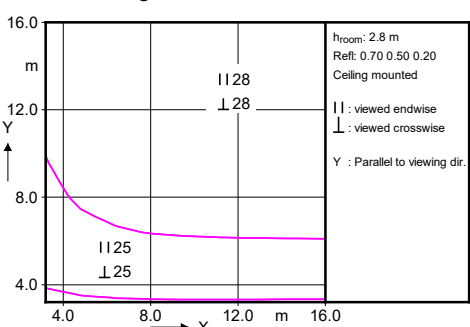

Light output ratio 1.00
Service upward 0.23
Service downward 0.77
CIE flux code 36 64 84 77 100
UGRcen (4Hx8H, 0.25H) 27

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	25201	22865	21607	21208	21607	22865	25201
50.0	23776	21381	20108	19708	20108	21381	23776
55.0	22589	20131	18842	18439	18842	20131	22589
60.0	21458	18943	17643	17240	17643	18943	21458
65.0	20414	17843	16534	16130	16534	17843	20414
70.0	19570	16923	15597	15191	15597	16923	19570
75.0	18743	16018	14677	14270	14677	16018	18743
80.0	18164	15322	13950	13536	13950	15322	18164
85.0	17661	14676	13266	12846	13266	14676	17661
90.0	17531	14314	12834	12396	12834	14314	17531

(cd/m²)