



1 x 9290037846 14W 2700K

1 x 1500 lm


Polar intensity diagram



Quantity estimation diagram

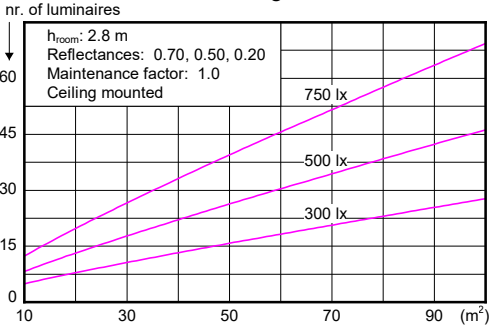

UGR diagram

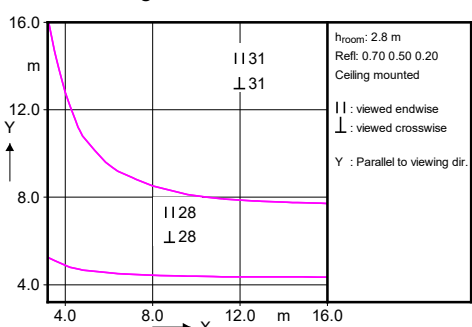

Light output ratio 1.00
Service upward 0.33
Service downward 0.67
CIE flux code 28 54 79 67 100
UGRcen (4Hx8H, 0.25H) 29

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	37041	33608	31757	31172	31757	33608	37041
50.0	36853	33141	31168	30548	31168	33141	36853
55.0	36826	32818	30716	30060	30716	32818	36826
60.0	36932	32604	30366	29672	30366	32604	36932
65.0	37204	32518	30132	29396	30132	32518	37204
70.0	37679	32583	30029	29247	30029	32583	37679
75.0	38342	32769	30026	29192	30026	32769	38342
80.0	39322	33170	30199	29304	30199	33170	39322
85.0	40639	33770	30527	29559	30527	33770	40639
90.0	42428	34642	31059	30001	31059	34642	42428

(cd/m²)