



1 x 9290037849 14W 5000K

1 x 1500 lm


Polar intensity diagram



Quantity estimation diagram

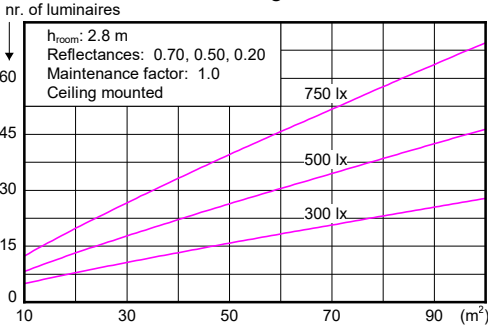

UGR diagram

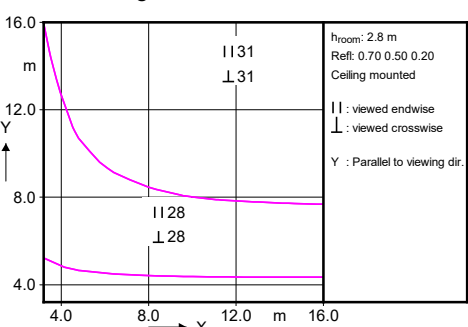

Light output ratio 1.00
Service upward 0.33
Service downward 0.67

CIE flux code 28 54 78 67 100

UGRcen (4Hx8H, 0.25H) 29

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.80	0.50	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
1.25	0.67	0.61	0.62	0.60	0.57	0.50	0.44	0.39	0.39	0.35	0.27	0.27
1.50	0.76	0.68	0.71	0.67	0.64	0.57	0.51	0.46	0.45	0.41	0.33	0.33
2.00	0.82	0.73	0.77	0.73	0.69	0.63	0.56	0.51	0.50	0.46	0.37	0.37
2.50	0.87	0.76	0.81	0.76	0.72	0.66	0.60	0.55	0.53	0.50	0.40	0.40
3.00	0.94	0.81	0.87	0.82	0.77	0.72	0.65	0.61	0.58	0.55	0.44	0.44
4.00	0.98	0.84	0.91	0.85	0.80	0.76	0.68	0.65	0.61	0.58	0.47	0.47
5.00												

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	37073	33637	31785	31199	31785	33637	37073
50.0	36921	33202	31226	30604	31226	33202	36921
55.0	36893	32877	30772	30114	30772	32877	36893
60.0	37033	32692	30449	29753	30449	32692	37033
65.0	37330	32628	30234	29496	30234	32628	37330
70.0	37791	32679	30118	29334	30118	32679	37791
75.0	38513	32916	30160	29323	30160	32916	38513
80.0	39481	33303	30321	29422	30321	33303	39481
85.0	40818	33919	30661	29689	30661	33919	40818
90.0	42620	34799	31200	30137	31200	34799	42620

(cd/m²)