



1 x 9290036520 4.0W 6500K

1 x 350 lm


Polar intensity diagram



Quantity estimation diagram

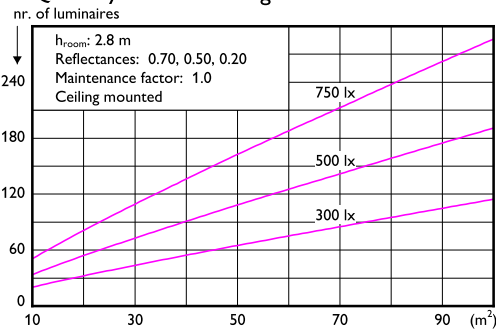

UGR diagram

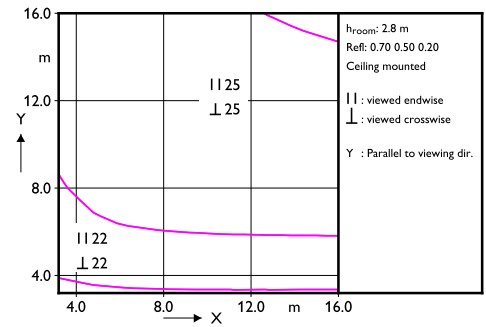

Light output ratio 1.00
Service upward 0.27
Service downward 0.73

CIE flux code 31 59 82 73 100

UGRcen (4Hx8H, 0.25H) 24

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80 0.80				0.70 0.70 0.70 0.70				0.50 0.50 0.30 0.30			
	0.50 0.50	0.30 0.10	0.50 0.50	0.30 0.10	0.50 0.50	0.30 0.10	0.50 0.50	0.30 0.10	0.50 0.50	0.30 0.10	0.50 0.50	0.30 0.10
0.60	0.38	0.36	0.36	0.35	0.34	0.27	0.24	0.20	0.22	0.18	0.14	0.14
0.80	0.47	0.44	0.45	0.43	0.42	0.34	0.31	0.26	0.29	0.24	0.19	0.19
1.00	0.55	0.51	0.52	0.50	0.49	0.41	0.37	0.32	0.34	0.29	0.24	0.24
1.25	0.63	0.58	0.59	0.57	0.55	0.47	0.43	0.38	0.39	0.35	0.28	0.28
1.50	0.69	0.63	0.65	0.62	0.60	0.52	0.48	0.43	0.43	0.39	0.32	0.32
2.00	0.79	0.70	0.74	0.70	0.67	0.60	0.55	0.50	0.50	0.46	0.38	0.38
2.50	0.85	0.75	0.80	0.76	0.72	0.66	0.60	0.55	0.55	0.51	0.43	0.43
3.00	0.90	0.79	0.84	0.79	0.75	0.70	0.64	0.60	0.58	0.55	0.46	0.46
4.00	0.97	0.84	0.90	0.85	0.80	0.75	0.69	0.65	0.63	0.60	0.51	0.51
5.00	1.01	0.87	0.94	0.88	0.83	0.79	0.72	0.69	0.66	0.63	0.54	0.54

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	10126	9188	8682	8522	8682	9188	10126
50.0	9860	8867	8339	8173	8339	8867	9860
55.0	9603	8558	8010	7839	8010	8558	9603
60.0	9361	8264	7697	7521	7697	8264	9361
65.0	9137	7986	7400	7220	7400	7986	9137
70.0	8951	7740	7134	6948	7134	7740	8951
75.0	8805	7525	6895	6704	6895	7525	8805
80.0	8722	7357	6698	6500	6698	7357	8722
85.0	8718	7244	6549	6341	6549	7244	8718
90.0	8805	7190	6446	6226	6446	7190	8805

(cd/m²)

2024-01-11