



1 x 9290042663 10W 3000K

1 x 800 lm


Polar intensity diagram



Quantity estimation diagram

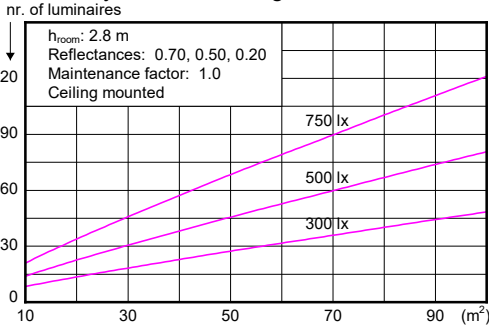

UGR diagram

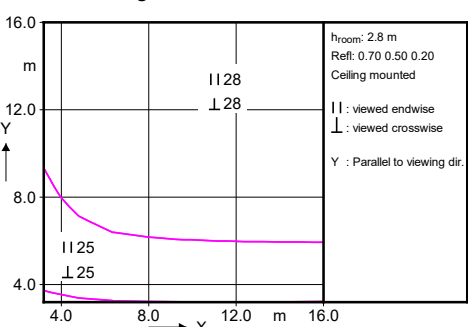

Light output ratio 1.00
Service upward 0.22
Service downward 0.78
CIE flux code 35 63 84 78 100
UGRcen (4Hx8H, 0.25H) 27

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	25680	23300	22017	21611	22017	23300	25680
50.0	24362	21908	20604	20194	20604	21908	24362
55.0	23070	20559	19242	18831	19242	20559	23070
60.0	21983	19407	18075	17662	18075	19407	21983
65.0	20849	18223	16886	16473	16886	18223	20849
70.0	19846	17161	15817	15405	15817	17161	19846
75.0	18991	16231	14872	14459	14872	16231	18991
80.0	18248	15393	14015	13599	14015	15393	18248
85.0	17741	14743	13327	12904	13327	14743	17741
90.0	17459	14255	12781	12345	12781	14255	17459

(cd/m²)