



1 x 9290042291 10W 6500K

1 x 800 lm


Polar intensity diagram



Quantity estimation diagram

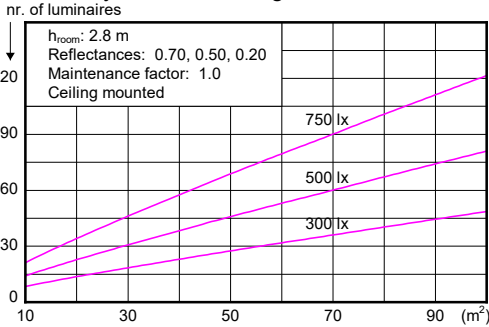

UGR diagram

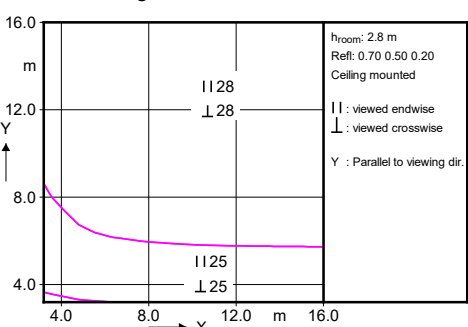

Light output ratio 1.00
Service upward 0.22
Service downward 0.78

CIE flux code 34 62 84 78 100

UGRcen (4Hx8H, 0.25H) 27

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.80	0.50	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.00
1.25	0.65	0.59	0.62	0.59	0.57	0.49	0.46	0.40	0.42	0.38	0.32	0.27
1.50	0.71	0.64	0.67	0.64	0.62	0.54	0.51	0.45	0.47	0.42	0.36	0.32
2.00	0.81	0.72	0.76	0.72	0.69	0.62	0.58	0.53	0.54	0.50	0.43	0.36
2.50	0.87	0.77	0.82	0.78	0.74	0.68	0.63	0.59	0.58	0.55	0.48	0.36
3.00	0.92	0.81	0.87	0.82	0.77	0.72	0.67	0.63	0.62	0.59	0.51	0.36
4.00	0.98	0.85	0.93	0.87	0.82	0.77	0.72	0.68	0.67	0.64	0.56	0.36
5.00	1.03	0.88	0.97	0.90	0.85	0.81	0.75	0.72	0.70	0.67	0.59	0.36

Ceiling mounted

Luminance Table

Plane	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	25492	23129	21856	21453	21856	23129	25492
50.0	24395	21938	20632	20222	20632	21938	24395
55.0	23345	20804	19472	19056	19472	20804	23345
60.0	22320	19704	18352	17933	18352	19704	22320
65.0	21292	18610	17244	16823	17244	18610	21292
70.0	20339	17588	16210	15788	16210	17588	20339
75.0	19503	16668	15273	14849	15273	16668	19503
80.0	18804	15861	14441	14013	14441	15861	18804
85.0	18247	15163	13707	13272	13707	15163	18247
90.0	17901	14616	13105	12658	13105	14616	17901

(cd/m²)