
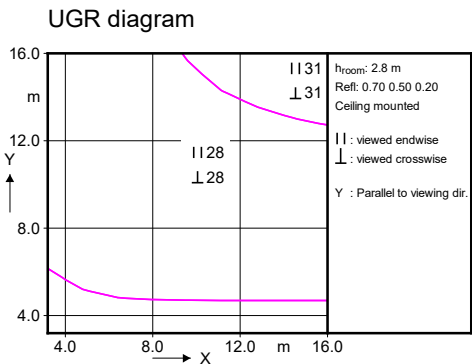
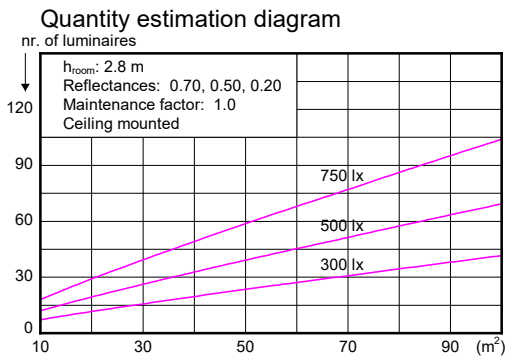


1 x 9290042292 12W 6500K

1 x 910 lm

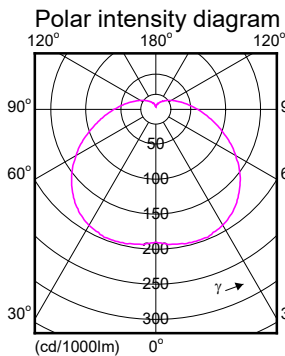

Light output ratio 1.00
Service upward 0.18
Service downward 0.82

CIE flux code 36 65 86 82 100

UGR_{cen} (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)															
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.30	0.30	0.10	0.10	0.10	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.30	0.30	0.10	0.10	0.10	0.00
0.80	0.50	0.50	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.00
1.00	0.58	0.54	0.56	0.54	0.52	0.44	0.42	0.36	0.39	0.35	0.30	0.30	0.30	0.30	0.30	0.00
1.25	0.66	0.61	0.64	0.61	0.59	0.51	0.48	0.43	0.45	0.41	0.36	0.36	0.36	0.36	0.36	0.00
1.50	0.73	0.66	0.69	0.66	0.64	0.56	0.53	0.48	0.50	0.45	0.40	0.40	0.40	0.40	0.40	0.00
2.00	0.82	0.74	0.78	0.75	0.71	0.64	0.61	0.56	0.57	0.53	0.47	0.47	0.47	0.47	0.47	0.00
2.50	0.89	0.79	0.85	0.80	0.76	0.70	0.66	0.61	0.62	0.58	0.52	0.52	0.52	0.52	0.52	0.00
3.00	0.94	0.82	0.89	0.84	0.79	0.74	0.70	0.66	0.65	0.62	0.56	0.56	0.56	0.56	0.56	0.00
4.00	1.00	0.87	0.95	0.89	0.84	0.79	0.75	0.71	0.70	0.67	0.60	0.60	0.60	0.60	0.60	0.00
5.00	1.05	0.90	0.99	0.92	0.87	0.83	0.78	0.75	0.73	0.71	0.64	0.64	0.64	0.64	0.64	0.00

Ceiling mounted

Luminance Table

Plane	0.0	15.0	30.0	45.0	60.0	75.0	90.0
Cone							
45.0	32712	29680	28046	27529	28046	29680	32712
50.0	31009	27886	26226	25704	26226	27886	31009
55.0	29163	25989	24325	23805	24325	25989	29163
60.0	27250	24056	22405	21893	22405	24056	27250
65.0	25390	22192	20564	20062	20564	22192	25390
70.0	23353	20194	18611	18127	18611	20194	23353
75.0	21746	18585	17029	16556	17029	18585	21746
80.0	20300	17124	15590	15128	15590	17124	20300
85.0	18972	15765	14251	13799	14251	15765	18972
90.0	18136	14808	13276	12824	13276	14808	18136

(cd/m²)