



1 x 9290042293 14W 6500K

1 x 1310 lm


Polar intensity diagram



Quantity estimation diagram

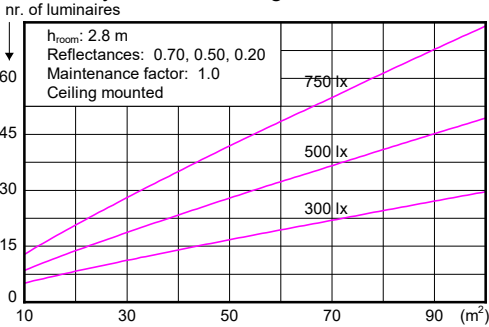

UGR diagram

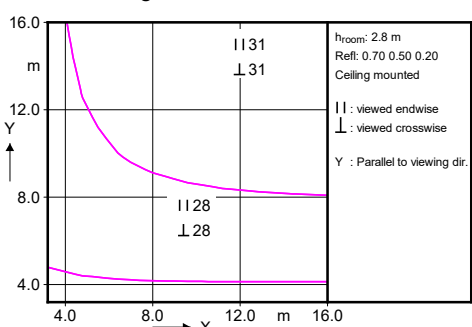

Light output ratio 1.00
Service upward 0.22
Service downward 0.78
CIE flux code 35 62 84 78 100
UGRcen (4Hx8H, 0.25H) 29

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
0.80	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
1.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
1.25	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
1.50	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
2.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
2.50	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
3.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
4.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
5.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00

Ceiling mounted

Luminance Table

Plane	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	41363	37529	35462	34809	35462	37529	41363
50.0	39325	35365	33259	32597	33259	35365	39325
55.0	37578	33488	31343	30673	31343	33488	37578
60.0	35979	31762	29582	28906	29582	31762	35979
65.0	34465	30124	27913	27232	27913	30124	34465
70.0	33161	28675	26428	25740	26428	28675	33161
75.0	31999	27348	25059	24363	25059	27348	31999
80.0	30968	26122	23783	23078	23783	26122	30968
85.0	30149	25054	22648	21929	22648	25054	30149
90.0	29790	24324	21808	21065	21808	24324	29790

(cd/m²)