



1 x 9290042290 8W 6500K

1 x 550 lm


Polar intensity diagram



Quantity estimation diagram

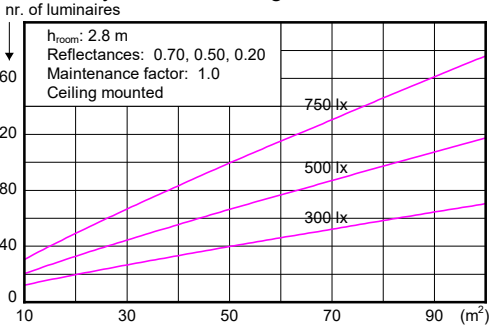

UGR diagram

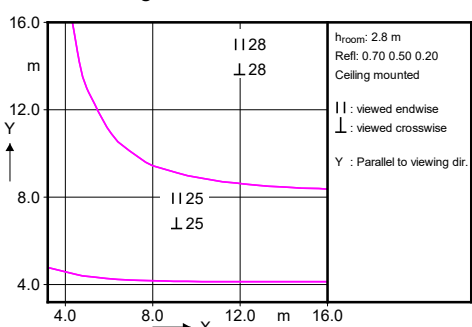

Light output ratio 1.00
Service upward 0.22
Service downward 0.78
CIE flux code 35 63 84 78 100
UGRcen (4Hx8H, 0.25H) 26

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
0.80	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
1.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
1.25	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
1.50	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
2.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
2.50	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
3.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
4.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
5.00	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00

Ceiling mounted

Luminance Table

Plane	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	17677	16039	15156	14876	15156	16039	17677
50.0	16880	15180	14277	13992	14277	15180	16880
55.0	16056	14309	13392	13106	13392	14309	16056
60.0	15215	13431	12510	12224	12510	13431	15215
65.0	14430	12613	11687	11402	11687	12613	14430
70.0	13758	11897	10965	10679	10965	11897	13758
75.0	13137	11228	10288	10002	10288	11228	13137
80.0	12673	10690	9733	9445	9733	10690	12673
85.0	12249	10179	9201	8910	9201	10179	12249
90.0	12040	9831	8814	8514	8814	9831	12040

(cd/m²)