



1 x 9290038255 4.4W 5000K

1 x 485 lm


Polar intensity diagram



Quantity estimation diagram

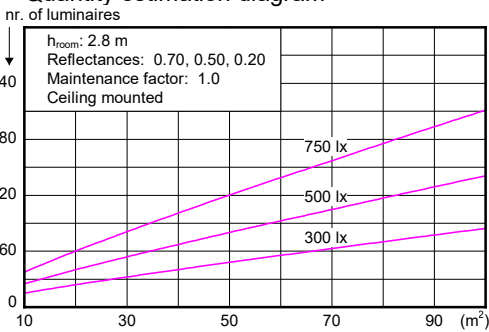

UGR diagram

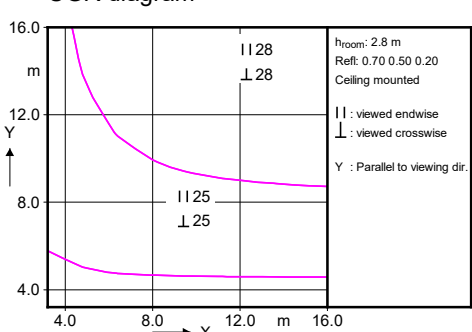

Light output ratio 1.00
Service upward 0.30
Service downward 0.70

CIE flux code 29 56 80 70 100

UGRcen (4Hx8H, 0.25H) 26

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.37	0.35	0.35	0.34	0.33	0.26	0.23	0.19	0.21	0.17	0.13	0.13
0.80	0.46	0.43	0.44	0.42	0.41	0.33	0.30	0.25	0.27	0.22	0.17	0.17
1.00	0.54	0.50	0.51	0.49	0.47	0.39	0.36	0.30	0.32	0.27	0.22	0.22
1.25	0.62	0.56	0.58	0.56	0.53	0.46	0.41	0.36	0.37	0.32	0.26	0.26
1.50	0.68	0.61	0.63	0.61	0.58	0.51	0.46	0.41	0.41	0.37	0.30	0.30
2.00	0.77	0.69	0.72	0.69	0.65	0.58	0.53	0.48	0.47	0.43	0.35	0.35
2.50	0.84	0.74	0.78	0.74	0.70	0.64	0.58	0.53	0.52	0.48	0.40	0.40
3.00	0.88	0.77	0.83	0.78	0.74	0.68	0.61	0.57	0.55	0.52	0.43	0.43
4.00	0.95	0.82	0.89	0.83	0.78	0.73	0.67	0.63	0.60	0.57	0.47	0.47
5.00	0.99	0.85	0.93	0.87	0.81	0.77	0.70	0.67	0.63	0.60	0.51	0.51

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	13522	12334	11689	11484	11689	12334	13522
50.0	13372	12089	11402	11185	11402	12089	13372
55.0	13284	11901	11170	10940	11170	11901	13284
60.0	13263	11768	10990	10747	10990	11768	13263
65.0	13278	11662	10833	10577	10833	11662	13278
70.0	13371	11613	10727	10455	10727	11613	13371
75.0	13532	11610	10658	10368	10658	11610	13532
80.0	13769	11649	10621	10311	10621	11649	13769
85.0	14171	11797	10673	10337	10673	11797	14171
90.0	14749	12042	10797	10429	10797	12042	14749

(cd/m²)