



1 x 9290038254 6.5W 3500K

1 x 800 lm


Polar intensity diagram



Quantity estimation diagram

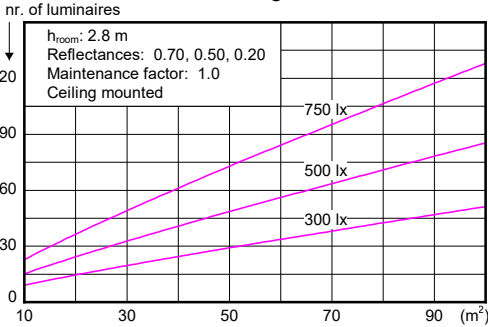

UGR diagram

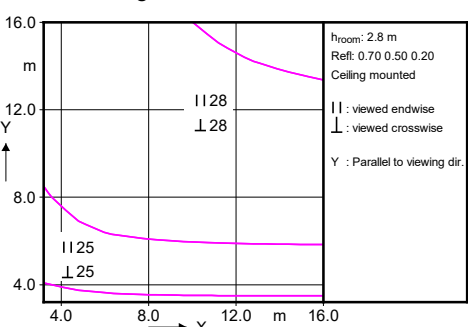

Light output ratio 1.00
Service upward 0.30
Service downward 0.70

CIE flux code 29 56 80 70 100

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.37	0.35	0.35	0.34	0.33	0.26	0.23	0.19	0.21	0.17	0.13	0.13
0.80	0.46	0.43	0.44	0.42	0.41	0.33	0.30	0.25	0.27	0.22	0.17	0.17
1.00	0.54	0.50	0.51	0.49	0.47	0.39	0.36	0.30	0.32	0.27	0.22	0.22
1.25	0.62	0.56	0.58	0.56	0.53	0.46	0.41	0.36	0.37	0.32	0.26	0.26
1.50	0.68	0.61	0.63	0.61	0.58	0.51	0.46	0.41	0.41	0.37	0.30	0.30
2.00	0.77	0.69	0.72	0.69	0.65	0.58	0.53	0.48	0.47	0.43	0.35	0.35
2.50	0.84	0.74	0.78	0.74	0.70	0.64	0.58	0.53	0.52	0.48	0.40	0.40
3.00	0.88	0.77	0.83	0.78	0.74	0.68	0.61	0.57	0.55	0.52	0.43	0.43
4.00	0.95	0.82	0.89	0.83	0.78	0.73	0.67	0.63	0.60	0.57	0.47	0.47
5.00	0.99	0.85	0.93	0.87	0.81	0.77	0.70	0.67	0.63	0.60	0.51	0.51

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	22255	20300	19237	18900	19237	20300	22255
50.0	22075	19958	18823	18465	18823	19958	22075
55.0	21924	19641	18434	18056	18434	19641	21924
60.0	21839	19378	18096	17697	18096	19378	21839
65.0	21881	19217	17851	17429	17851	19217	21881
70.0	21958	19072	17617	17170	17617	19072	21958
75.0	22215	19059	17497	17021	17497	19059	22215
80.0	22631	19147	17457	16947	17457	19147	22631
85.0	23251	19355	17511	16960	17511	19355	23251
90.0	24173	19737	17696	17093	17696	19737	24173

(cd/m²)