



1 x 9290038256 6.5W 5000K

1 x 800 lm


Polar intensity diagram



Quantity estimation diagram

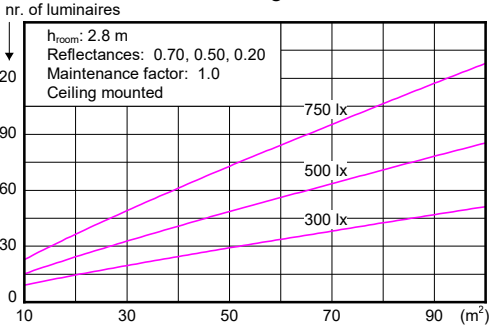

UGR diagram

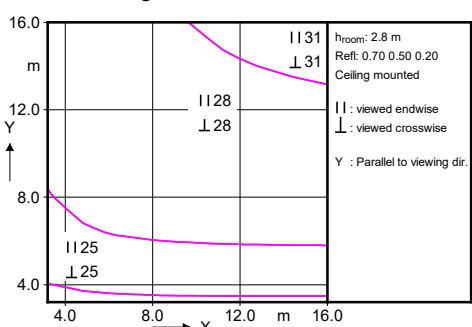

Light output ratio 1.00
Service upward 0.30
Service downward 0.70

CIE flux code 29 56 80 70 100

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.37	0.35	0.35	0.34	0.33	0.26	0.23	0.19	0.21	0.17	0.13	0.13
0.80	0.46	0.43	0.44	0.42	0.41	0.33	0.30	0.25	0.27	0.22	0.17	0.17
1.00	0.54	0.50	0.51	0.49	0.47	0.39	0.36	0.30	0.32	0.27	0.22	0.22
1.25	0.62	0.56	0.58	0.56	0.53	0.46	0.41	0.36	0.37	0.32	0.26	0.26
1.50	0.68	0.61	0.63	0.61	0.58	0.51	0.46	0.41	0.41	0.37	0.30	0.30
2.00	0.77	0.69	0.72	0.69	0.65	0.58	0.53	0.48	0.47	0.43	0.35	0.35
2.50	0.84	0.74	0.78	0.74	0.70	0.64	0.58	0.53	0.52	0.48	0.40	0.40
3.00	0.88	0.77	0.83	0.78	0.74	0.68	0.61	0.57	0.55	0.52	0.43	0.43
4.00	0.95	0.82	0.89	0.83	0.78	0.73	0.67	0.63	0.60	0.57	0.47	0.47
5.00	0.99	0.85	0.93	0.87	0.81	0.77	0.70	0.67	0.63	0.60	0.51	0.51

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	22409	20440	19371	19031	19371	20440	22409
50.0	22181	20054	18913	18554	18913	20054	22181
55.0	22028	19734	18522	18142	18522	19734	22028
60.0	21949	19475	18187	17786	18187	19475	21949
65.0	21937	19267	17898	17474	17898	19267	21937
70.0	22099	19194	17730	17280	17730	19194	22099
75.0	22302	19134	17565	17087	17565	19134	22302
80.0	22735	19235	17538	17025	17538	19235	22735
85.0	23419	19495	17637	17082	17637	19495	23419
90.0	24341	19874	17819	17212	17819	19874	24341

(cd/m²)