
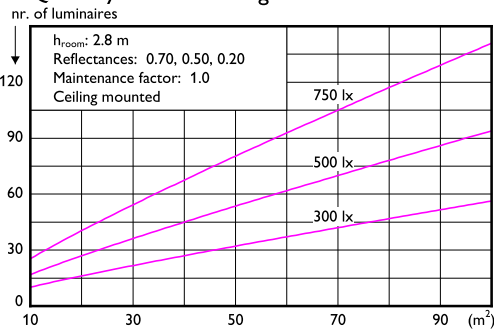
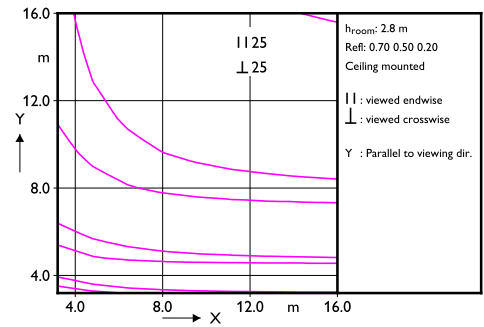


1 x 9290037994 2200-2700K 5.9W**1 x 806 lm****Polar intensity diagram****Quantity estimation diagram****UGR diagram****Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.34	0.32	0.31	0.30	0.30	0.22	0.19	0.14	0.15	0.11	0.06	0.06
0.80	0.43	0.40	0.39	0.38	0.37	0.29	0.24	0.19	0.19	0.16	0.09	0.09
1.00	0.50	0.46	0.45	0.44	0.42	0.35	0.29	0.24	0.23	0.19	0.11	0.11
1.25	0.57	0.52	0.52	0.50	0.48	0.40	0.34	0.29	0.27	0.23	0.14	0.14
1.50	0.63	0.57	0.57	0.55	0.52	0.45	0.37	0.33	0.30	0.26	0.16	0.16
2.00	0.72	0.64	0.65	0.62	0.59	0.52	0.43	0.39	0.35	0.32	0.20	0.20
2.50	0.78	0.69	0.70	0.67	0.63	0.57	0.48	0.43	0.39	0.36	0.23	0.23
3.00	0.82	0.72	0.75	0.70	0.67	0.61	0.51	0.47	0.42	0.39	0.25	0.25
4.00	0.89	0.77	0.81	0.76	0.71	0.66	0.56	0.52	0.46	0.43	0.29	0.29
5.00	0.93	0.80	0.84	0.79	0.74	0.70	0.59	0.56	0.49	0.46	0.31	0.31

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	7137	6058	5426	5089	4979	5075	5396
50.0	7600	6353	5639	5264	5143	5249	5606
55.0	8178	6728	5919	5500	5364	5483	5882
60.0	8861	7170	6251	5781	5630	5762	6209
65.0	9655	7677	6630	6102	5933	6081	6582
70.0	10581	8254	7057	6463	6275	6440	7004
75.0	11677	8919	7546	6874	6663	6848	7485
80.0	12967	9673	8089	7328	7091	7298	8020
85.0	14532	10548	8708	7840	7572	7807	8628
90.0	16439	11551	9397	8403	8098	8365	9305

(cd/m²)

Light output ratio 1.00
Service upward 0.51
Service downward 0.49

CIE flux code 20 43 70 49 100

UGRcen (4Hx8H, 0.25H) 24

2024-06-18