



1 x 9290037845 14W 2200-2700K

1 x 1500 lm


Polar intensity diagram



Quantity estimation diagram

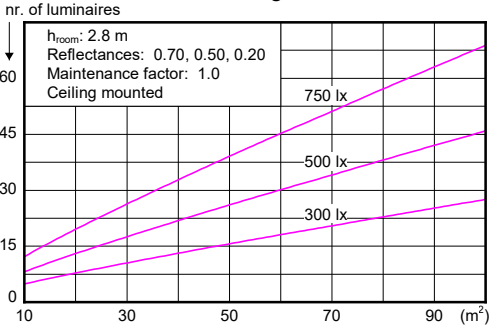

UGR diagram

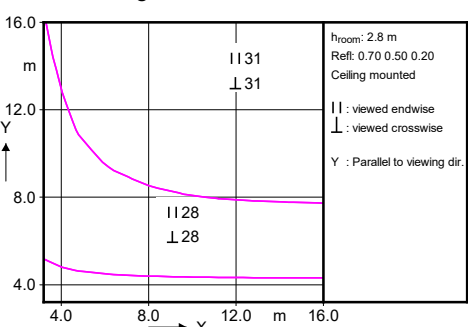

Light output ratio 1.00
Service upward 0.32
Service downward 0.68

CIE flux code 29 56 79 68 100

UGRcen (4Hx8H, 0.25H) 29

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.37	0.35	0.35	0.34	0.33	0.26	0.23	0.18	0.21	0.17	0.12	0.12
0.80	0.46	0.43	0.43	0.42	0.41	0.33	0.30	0.25	0.26	0.22	0.17	0.17
1.00	0.54	0.50	0.50	0.49	0.47	0.39	0.35	0.30	0.31	0.27	0.21	0.21
1.25	0.61	0.56	0.58	0.55	0.53	0.45	0.41	0.36	0.36	0.32	0.25	0.25
1.50	0.68	0.61	0.63	0.60	0.58	0.50	0.45	0.40	0.40	0.36	0.29	0.29
2.00	0.77	0.69	0.72	0.68	0.65	0.58	0.52	0.47	0.46	0.42	0.34	0.34
2.50	0.83	0.73	0.78	0.73	0.70	0.63	0.57	0.52	0.51	0.47	0.38	0.38
3.00	0.88	0.77	0.82	0.77	0.73	0.67	0.61	0.56	0.54	0.51	0.41	0.41
4.00	0.94	0.82	0.88	0.82	0.78	0.73	0.65	0.62	0.59	0.56	0.46	0.46
5.00	0.99	0.85	0.92	0.86	0.81	0.76	0.69	0.66	0.62	0.59	0.49	0.49

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	38291	34742	32829	32224	32829	34742	38291
50.0	37755	33953	31931	31296	31931	33953	37755
55.0	37381	33312	31179	30513	31179	33312	37381
60.0	37147	32793	30543	29844	30543	32793	37147
65.0	37294	32597	30205	29468	30205	32597	37294
70.0	37476	32407	29867	29090	29867	32407	37476
75.0	38122	32581	29854	29025	29854	32581	38122
80.0	38710	32653	29729	28848	29729	32653	38710
85.0	39745	33028	29855	28909	29855	33028	39745
90.0	41465	33856	30354	29320	30354	33856	41465

(cd/m²)