
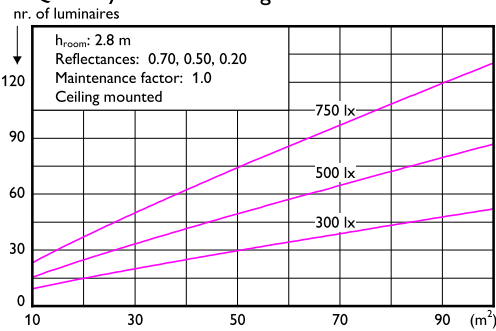
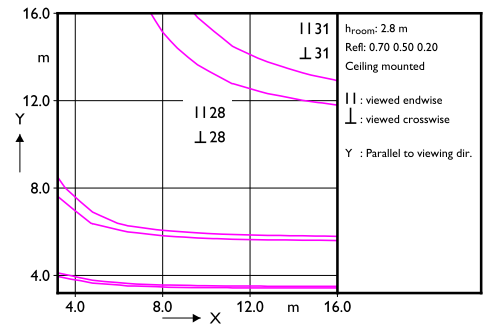


1 x 9290036203 8.0W 2700K**1 x 800 lm****Polar intensity diagram****Quantity estimation diagram****UGR diagram**

Light output ratio 1.00
 Service upward 0.34
 Service downward 0.66

CIE flux code 28 54 79 66 100

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.37	0.35	0.34	0.34	0.33	0.25	0.23	0.18	0.20	0.16	0.12	0.12
0.80	0.46	0.43	0.43	0.42	0.40	0.32	0.29	0.24	0.26	0.21	0.16	0.16
1.00	0.53	0.49	0.50	0.48	0.47	0.39	0.34	0.29	0.30	0.26	0.20	0.20
1.25	0.61	0.56	0.57	0.55	0.53	0.45	0.40	0.35	0.35	0.31	0.24	0.24
1.50	0.67	0.61	0.62	0.60	0.57	0.50	0.44	0.39	0.39	0.35	0.27	0.27
2.00	0.76	0.68	0.71	0.67	0.64	0.57	0.51	0.46	0.45	0.41	0.33	0.33
2.50	0.83	0.73	0.77	0.73	0.69	0.63	0.56	0.52	0.50	0.46	0.37	0.37
3.00	0.87	0.77	0.81	0.77	0.72	0.67	0.60	0.56	0.53	0.50	0.40	0.40
4.00	0.94	0.81	0.87	0.82	0.77	0.72	0.65	0.61	0.57	0.55	0.44	0.44
5.00	0.99	0.85	0.91	0.85	0.80	0.76	0.68	0.65	0.61	0.58	0.47	0.47

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	22769	20966	20080	19966	20605	22102	24721
50.0	22616	20673	19729	19608	20288	21893	24750
55.0	22529	20441	19439	19311	20032	21749	24860
60.0	22529	20285	19219	19084	19848	21687	25075
65.0	22583	20170	19038	18894	19705	21673	25368
70.0	22755	20149	18942	18790	19652	21766	25819
75.0	23014	20189	18898	18736	19656	21937	26406
80.0	23464	20371	18978	18804	19795	22276	27264
85.0	24072	20653	19140	18953	20026	22750	28383
90.0	24941	21108	19444	19239	20415	23446	29929

(cd/m²)

2023-10-30