



1 x 9290024013 2700K 0.9W

1 x 70 lm


Polar intensity diagram



Quantity estimation diagram

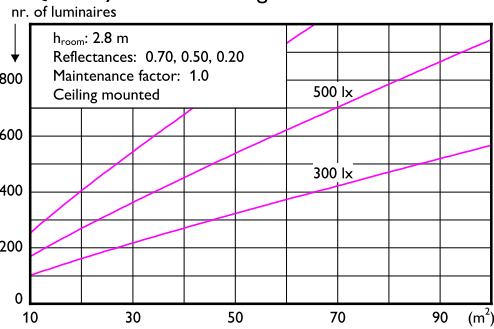

UGR diagram

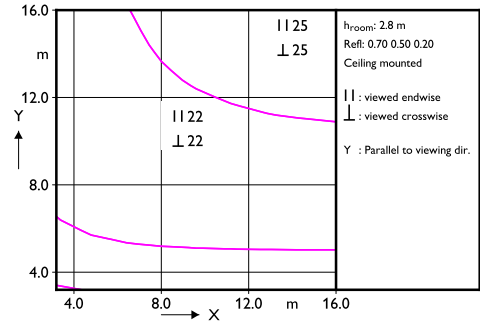

Light output ratio 1.04
Service upward 0.31
Service downward 0.73

CIE flux code 28 55 79 70 104

UGRcen (4Hx8H, 0.25H) 22

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	5967	5153	4746	4622	4746	5153	5967
50.0	5680	4872	4472	4351	4472	4872	5680
55.0	5432	4629	4236	4117	4236	4629	5432
60.0	5202	4406	4020	3903	4020	4406	5202
65.0	4997	4207	3827	3713	3827	4207	4997
70.0	4807	4023	3650	3537	3650	4023	4807
75.0	4639	3860	3491	3381	3491	3860	4639
80.0	4484	3708	3345	3237	3345	3708	4484
85.0	4344	3570	3211	3104	3211	3570	4344
90.0	4217	3443	3087	2982	3087	3443	4217

(cd/m²)

2020-05-29