



1 x 9290023853 3000K 12.2W

1 x 1100 lm


Polar intensity diagram



Quantity estimation diagram

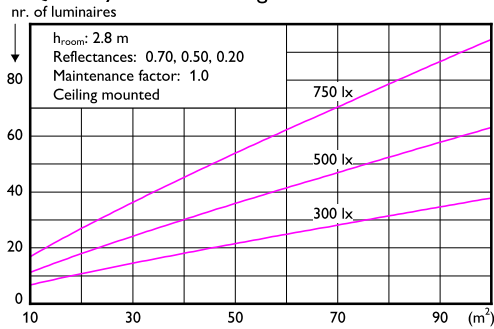

UGR diagram

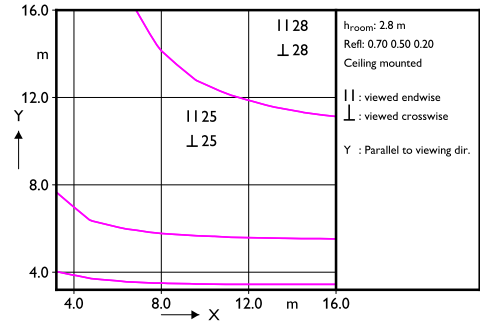

Light output ratio 1.00
Service upward 0.33
Service downward 0.67

CIE flux code 28 54 79 67 100

UGRcen (4Hx8H, 0.25H) 25

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	9272	8598	8222	8101	8222	8598	9272
50.0	9385	8629	8213	8081	8213	8629	9385
55.0	9574	8724	8263	8117	8263	8724	9574
60.0	9792	8836	8325	8164	8325	8836	9792
65.0	10090	9008	8439	8261	8439	9008	10090
70.0	10476	9239	8601	8403	8601	9239	10476
75.0	11004	9570	8846	8623	8846	9570	11004
80.0	11662	9975	9144	8891	9144	9975	11662
85.0	12572	10536	9563	9271	9563	10536	12572
90.0	13812	11277	10111	9766	10111	11277	13812

(cd/m²)

2020-06-22