



1 x 9290020377 7W 6500K A60

1 x 560 lm


Polar intensity diagram



Quantity estimation diagram

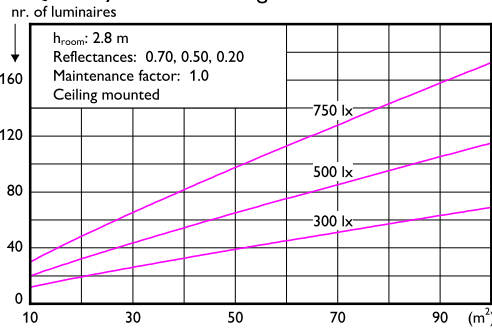

UGR diagram

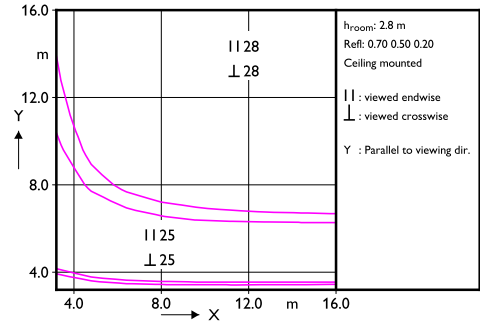

Light output ratio 1.00
Service upward 0.21
Service downward 0.79

CIE flux code 35 63 84 79 100

UGRcen (4Hx8H, 0.25H) 27

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)									
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10
0.80	0.50	0.50	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
1.00	0.58	0.53	0.55	0.53	0.51	0.43	0.40	0.35	0.38	0.33
1.25	0.65	0.60	0.62	0.60	0.58	0.50	0.46	0.41	0.43	0.39
1.50	0.72	0.65	0.68	0.65	0.62	0.55	0.51	0.46	0.48	0.43
2.00	0.81	0.72	0.77	0.73	0.70	0.63	0.59	0.54	0.50	0.44
2.50	0.88	0.77	0.83	0.78	0.74	0.68	0.64	0.59	0.56	0.49
3.00	0.92	0.81	0.87	0.82	0.78	0.72	0.67	0.63	0.59	0.52
4.00	0.99	0.85	0.93	0.87	0.82	0.78	0.72	0.69	0.67	0.64
5.00	1.03	0.88	0.97	0.91	0.85	0.81	0.76	0.73	0.70	0.68

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	21309	19690	18914	18855	19504	20965	23496
50.0	20172	18509	17720	17660	18319	19816	22455
55.0	19062	17366	16570	16510	17174	18697	21431
60.0	18029	16304	15503	15443	16110	17656	20481
65.0	17028	15280	14477	14417	15085	16647	19560
70.0	16144	14367	13561	13501	14171	15754	18771
75.0	15332	13522	12712	12651	13324	14933	18070
80.0	14626	12770	11952	11891	12570	14213	17504
85.0	14048	12127	11293	11232	11922	13617	17116
90.0	13666	11642	10781	10718	11430	13208	17013

(cd/m²)

2019-09-06