



1 x 9290020380 9W 6500K A60

1 x 806 lm


Polar intensity diagram



Quantity estimation diagram

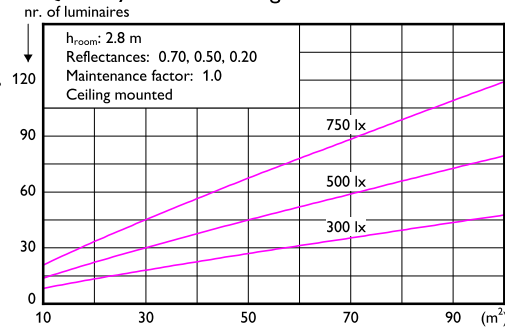

UGR diagram

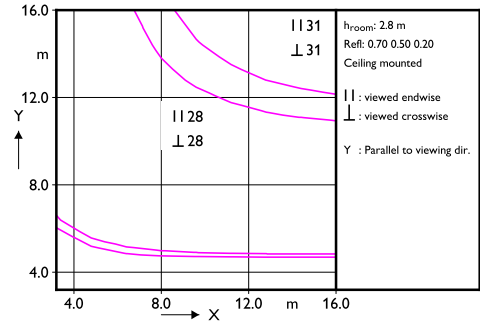

Light output ratio 1.00
Service upward 0.20
Service downward 0.80

CIE flux code 35 63 85 80 100

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)															
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.80	0.80	0.70	0.70	0.70
0.60	0.40	0.38	0.38	0.38	0.37	0.29	0.27	0.23	0.26	0.21	0.18	0.40	0.38	0.38	0.37	0.29
0.80	0.50	0.47	0.48	0.46	0.45	0.37	0.35	0.29	0.32	0.28	0.24	0.50	0.47	0.48	0.46	0.37
1.00	0.58	0.54	0.55	0.53	0.51	0.43	0.41	0.35	0.38	0.33	0.29	0.58	0.54	0.55	0.53	0.43
1.25	0.66	0.60	0.62	0.60	0.58	0.50	0.47	0.42	0.44	0.39	0.34	0.66	0.60	0.62	0.60	0.50
1.50	0.72	0.65	0.68	0.65	0.63	0.55	0.52	0.46	0.48	0.44	0.38	0.72	0.65	0.68	0.65	0.55
2.00	0.81	0.73	0.77	0.73	0.70	0.63	0.59	0.54	0.55	0.51	0.45	0.81	0.73	0.77	0.73	0.63
2.50	0.88	0.78	0.83	0.79	0.75	0.69	0.64	0.60	0.60	0.56	0.50	0.88	0.78	0.83	0.79	0.69
3.00	0.93	0.81	0.88	0.83	0.78	0.73	0.68	0.64	0.64	0.60	0.53	0.93	0.81	0.88	0.83	0.73
4.00	0.99	0.86	0.94	0.88	0.83	0.78	0.73	0.70	0.68	0.65	0.58	0.99	0.86	0.94	0.88	0.78
5.00	1.04	0.89	0.98	0.91	0.86	0.82	0.77	0.74	0.71	0.69	0.61	1.04	0.89	0.98	0.91	0.82

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	30845	28402	27202	27048	27914	29941	33489
50.0	29142	26638	25422	25267	26142	28211	31892
55.0	27499	24951	23727	23571	24451	26548	30344
60.0	25993	23404	22175	22018	22901	25022	28931
65.0	24574	21948	20716	20560	21443	23584	27605
70.0	23218	20559	19327	19172	20052	22209	26344
75.0	22069	19359	18121	17966	18849	21035	25320
80.0	21063	18286	17036	16880	17769	19997	24474
85.0	20178	17313	16044	15887	16787	19070	23792
90.0	19544	16541	15237	15076	15998	18373	23453

(cd/m²)

2019-09-06