



1 x 9290023114 8.5W 5000K

1 x 800 lm


Polar intensity diagram



Quantity estimation diagram

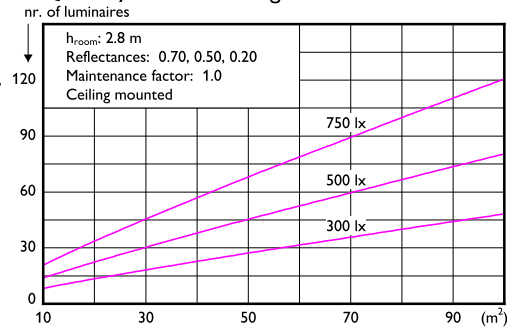

UGR diagram

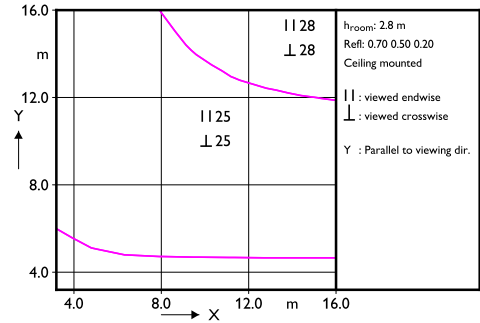

Light output ratio 1.00
Service upward 0.22
Service downward 0.78

CIE flux code 36 64 84 78 100

UGRcen (4Hx8H, 0.25H) 25

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)															
	0.80				0.70				0.50				0.30			
	0.80	0.80	0.50	0.50	0.70	0.70	0.50	0.50	0.30	0.30	0.50	0.50	0.30	0.30	0.10	0.10
0.60	0.80	0.80	0.50	0.50	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	17275	15120	14021	13682	14021	15120	17275
50.0	15823	13742	12693	12370	12693	13742	15823
55.0	14485	12486	11490	11185	11490	12486	14485
60.0	13258	11345	10402	10115	10402	11345	13258
65.0	12166	10335	9442	9172	9442	10335	12166
70.0	11183	9431	8585	8331	8585	9431	11183
75.0	10315	8634	7832	7591	7832	8634	10315
80.0	9570	7948	7183	6955	7183	7948	9570
85.0	8936	7361	6627	6409	6627	7361	8936
90.0	8420	6875	6164	5954	6164	6875	8420

(cd/m²)

2019-12-23