



1 x 9290024337 6500K 17W

1 x 2350 lm


Polar intensity diagram



Quantity estimation diagram

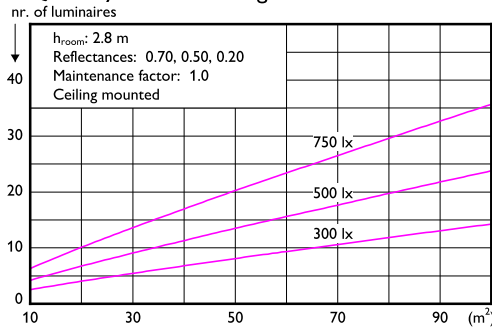

UGR diagram

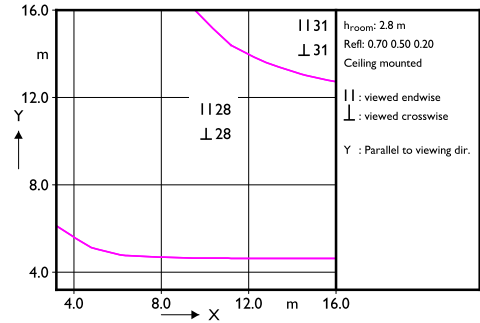

Light output ratio 1.12
Service upward 0.16
Service downward 0.96

CIE flux code 34 64 87 86 112

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	26000	24086	23021	22679	23021	24086	26000
50.0	25529	23450	22308	21943	22308	23450	25529
55.0	24990	22748	21534	21149	21534	22748	24990
60.0	23993	21629	20367	19970	20367	21629	23993
65.0	23016	20526	19219	18811	19219	20526	23016
70.0	21442	18893	17579	17172	17579	18893	21442
75.0	20056	17427	16100	15693	16100	17427	20056
80.0	18217	15571	14268	13872	14268	15571	18217
85.0	16637	13937	12647	12259	12647	13937	16637
90.0	15469	12630	11324	10938	11324	12630	15469

(cd/m²)

2020-06-17