



1 x 9290030845 6.6W

1 x 750 lm


Polar intensity diagram



Quantity estimation diagram

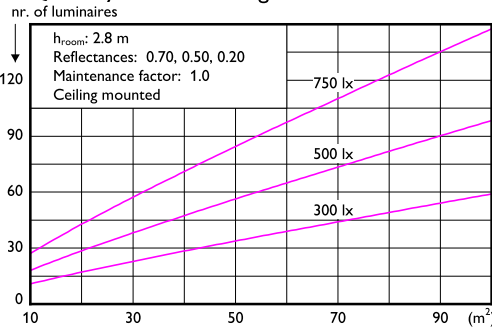

UGR diagram

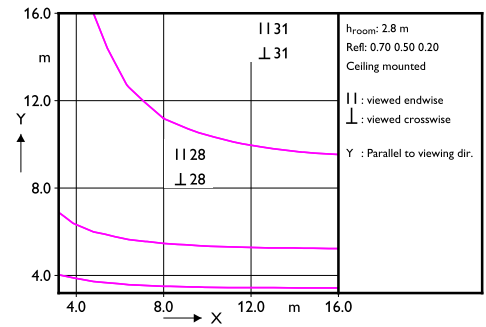

Light output ratio 1.00
Service upward 0.42
Service downward 0.58

CIE flux code 20 46 73 58 100

UGRcen (4Hx8H, 0.25H) 29

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.42	0.40	0.39	0.38	0.37	0.29	0.25	0.20	0.21	0.16	0.10	0.07
1.00	0.50	0.46	0.46	0.44	0.43	0.35	0.30	0.25	0.25	0.21	0.13	0.10
1.25	0.57	0.53	0.53	0.51	0.49	0.41	0.35	0.30	0.29	0.25	0.17	0.13
1.50	0.63	0.57	0.58	0.56	0.53	0.46	0.39	0.34	0.33	0.29	0.20	0.17
2.00	0.72	0.65	0.66	0.63	0.60	0.53	0.46	0.41	0.39	0.35	0.25	0.20
2.50	0.79	0.70	0.72	0.68	0.65	0.58	0.51	0.46	0.43	0.39	0.28	0.25
3.00	0.84	0.73	0.77	0.72	0.68	0.62	0.54	0.50	0.46	0.43	0.31	0.28
4.00	0.90	0.78	0.83	0.78	0.73	0.68	0.59	0.55	0.51	0.47	0.35	0.31
5.00	0.95	0.81	0.87	0.81	0.76	0.72	0.62	0.59	0.54	0.51	0.38	0.35

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	23152	21061	19929	19570	19929	21061	23152
50.0	24397	21997	20716	20312	20716	21997	24397
55.0	25706	22967	21525	21074	21525	22967	25706
60.0	27163	24039	22418	21914	22418	24039	27163
65.0	28742	25181	23361	22799	23361	25181	28742
70.0	30487	26420	24375	23749	24375	26420	30487
75.0	32343	27693	25398	24699	25398	27693	32343
80.0	34452	29103	26515	25734	26515	29103	34452
85.0	36970	30747	27805	26926	27805	30747	36970
90.0	40104	32745	29358	28358	29358	32745	40104

(cd/m²)

2021-11-05