



1 x 9290029874 3.5W 2000K

1 x 225 lm


Polar intensity diagram



Quantity estimation diagram

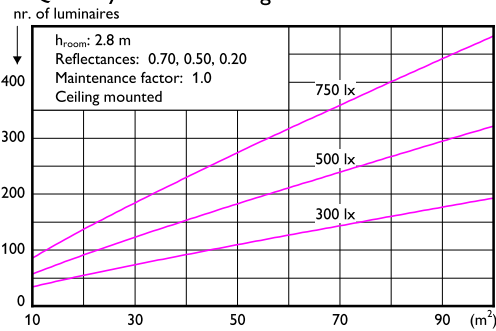

UGR diagram

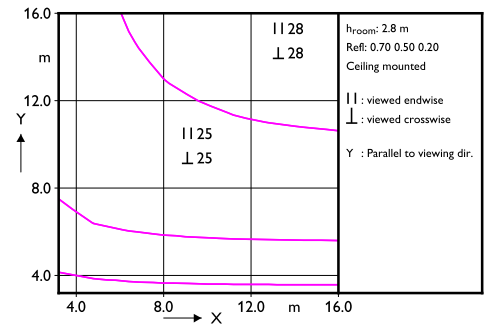

Light output ratio 1.00
Service upward 0.44
Service downward 0.56

CIE flux code 26 51 75 56 100

UGRcen (4Hx8H, 0.25H) 25

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80 0.80				0.70 0.70				0.50 0.50			
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.36	0.34	0.33	0.32	0.32	0.24	0.21	0.17	0.18	0.14	0.09	0.09
0.80	0.45	0.42	0.41	0.40	0.39	0.31	0.27	0.22	0.23	0.19	0.13	0.13
1.00	0.52	0.48	0.48	0.46	0.45	0.37	0.32	0.27	0.27	0.23	0.16	0.16
1.25	0.59	0.54	0.55	0.53	0.51	0.43	0.37	0.32	0.31	0.27	0.19	0.19
1.50	0.65	0.59	0.60	0.57	0.55	0.48	0.41	0.36	0.35	0.31	0.22	0.22
2.00	0.74	0.66	0.68	0.65	0.62	0.55	0.47	0.43	0.40	0.36	0.26	0.26
2.50	0.80	0.71	0.74	0.70	0.66	0.60	0.52	0.48	0.44	0.41	0.29	0.29
3.00	0.85	0.74	0.78	0.73	0.69	0.64	0.55	0.51	0.47	0.44	0.32	0.32
4.00	0.91	0.79	0.84	0.79	0.74	0.69	0.60	0.56	0.51	0.48	0.36	0.36
5.00	0.96	0.82	0.88	0.82	0.77	0.73	0.63	0.60	0.54	0.51	0.38	0.38

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	13623	12158	11388	11147	11388	12158	13623
50.0	12944	11452	10679	10438	10679	11452	12944
55.0	12843	11266	10459	10210	10459	11266	12843
60.0	12651	11002	10169	9913	10169	11002	12651
65.0	11754	10132	9323	9075	9323	10132	11754
70.0	13597	11612	10636	10340	10636	11612	13597
75.0	14304	12097	11027	10704	11027	12097	14304
80.0	14942	12504	11341	10992	11341	12504	14942
85.0	15433	12765	11514	11142	11514	12765	15433
90.0	16132	13172	11809	11407	11809	13172	16132

(cd/m²)

2021-07-28