
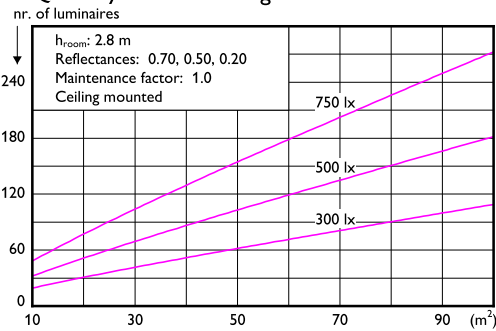
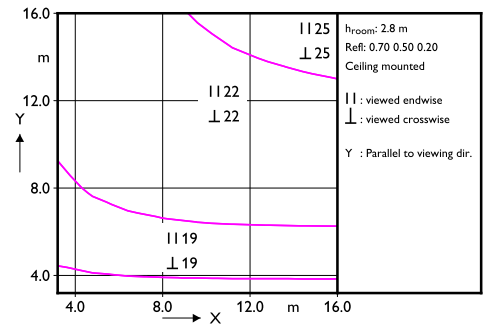


1 x 9290029895 6.5W 2000K**1 x 400 lm****Polar intensity diagram****Quantity estimation diagram****UGR diagram**

Light output ratio 1.00
 Service upward 0.50
 Service downward 0.50

CIE flux code 27 53 77 50 100

UGRcen (4Hx8H, 0.25H) 22

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.50	0.30	0.10	0.30	0.10	0.10	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	4794	4440	4243	4180	4243	4440	4794
50.0	4995	4587	4363	4292	4363	4587	4995
55.0	5161	4697	4446	4366	4446	4697	5161
60.0	5043	4545	4279	4195	4279	4545	5043
65.0	5116	4561	4270	4179	4270	4561	5116
70.0	5427	4780	4447	4344	4447	4780	5427
75.0	5709	4960	4582	4466	4582	4960	5709
80.0	6470	5529	5066	4925	5066	5529	6470
85.0	7219	6046	5486	5318	5486	6046	7219
90.0	8327	6799	6096	5888	6096	6799	8327

(cd/m²)

2021-07-28