



1 x 9290020915 2700-2200K 5.5W

1 x 500 lm


Polar intensity diagram



Quantity estimation diagram

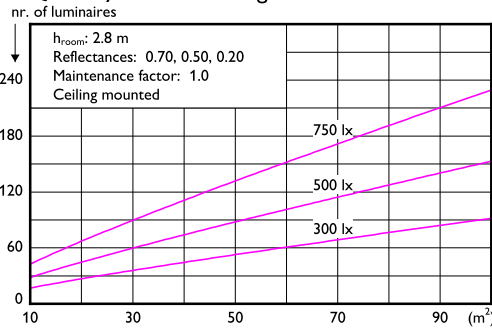

UGR diagram

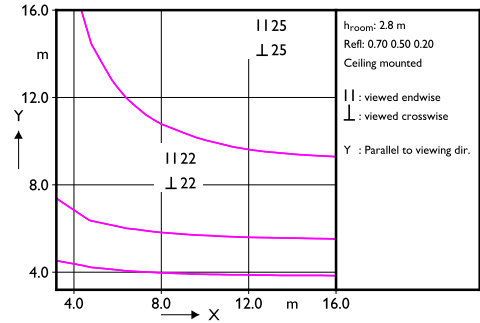

Light output ratio 1.02
Service upward 0.52
Service downward 0.50

CIE flux code 13 36 66 49 102

UGRcen (4Hx8H, 0.25H) 23

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.41	0.39	0.37	0.36	0.35	0.27	0.22	0.17	0.13	0.09	0.04	0.00
1.00	0.48	0.45	0.44	0.42	0.41	0.33	0.27	0.22	0.21	0.17	0.08	0.00
1.25	0.56	0.51	0.51	0.49	0.47	0.39	0.32	0.26	0.25	0.21	0.11	0.00
1.50	0.62	0.56	0.56	0.53	0.51	0.43	0.36	0.30	0.28	0.24	0.13	0.00
2.00	0.71	0.63	0.64	0.61	0.58	0.51	0.42	0.37	0.34	0.30	0.18	0.00
2.50	0.77	0.68	0.70	0.66	0.63	0.56	0.46	0.42	0.37	0.34	0.21	0.00
3.00	0.82	0.72	0.74	0.70	0.66	0.60	0.50	0.46	0.40	0.37	0.23	0.00
4.00	0.89	0.77	0.80	0.75	0.71	0.66	0.55	0.51	0.45	0.42	0.27	0.00
5.00	0.94	0.80	0.85	0.79	0.74	0.69	0.58	0.55	0.48	0.45	0.30	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	2529	2371	2282	2253	2282	2371	2529
50.0	2949	2744	2628	2591	2628	2744	2949
55.0	3488	3217	3067	3019	3067	3217	3488
60.0	4016	3669	3480	3420	3480	3669	4016
65.0	4660	4212	3972	3896	3972	4212	4660
70.0	5480	4891	4582	4485	4582	4891	5480
75.0	6282	5524	5135	5014	5135	5524	6282
80.0	7225	6238	5745	5594	5745	6238	7225
85.0	8530	7192	6547	6353	6547	7192	8530
90.0	10388	8482	7605	7345	7605	8482	10388

(cd/m²)

2020-08-10