



1 x 9290035397 2.3W**1 x 485 lm**


Polar intensity diagram



Quantity estimation diagram

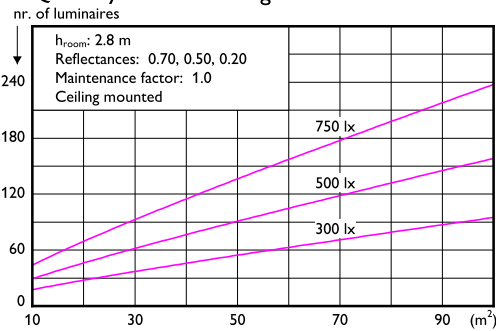

UGR diagram

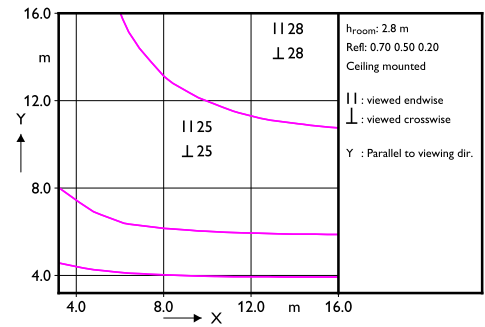

Light output ratio 1.00
Service upward 0.48
Service downward 0.52

CIE flux code 15 39 68 52 100

UGRcen (4Hx8H, 0.25H) 25

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.41	0.38	0.37	0.36	0.35	0.27	0.23	0.18	0.18	0.14	0.07	0.05
1.00	0.48	0.45	0.44	0.42	0.41	0.33	0.27	0.22	0.22	0.18	0.10	0.07
1.25	0.55	0.51	0.50	0.48	0.47	0.39	0.32	0.27	0.26	0.22	0.13	0.10
1.50	0.61	0.56	0.56	0.53	0.51	0.43	0.36	0.31	0.29	0.25	0.15	0.10
2.00	0.70	0.63	0.64	0.61	0.58	0.50	0.42	0.37	0.35	0.31	0.19	0.15
2.50	0.77	0.68	0.70	0.66	0.62	0.56	0.47	0.42	0.39	0.35	0.23	0.19
3.00	0.81	0.71	0.74	0.70	0.66	0.60	0.50	0.46	0.42	0.38	0.25	0.23
4.00	0.88	0.76	0.80	0.75	0.71	0.65	0.55	0.51	0.46	0.43	0.29	0.25
5.00	0.93	0.80	0.84	0.79	0.74	0.69	0.59	0.55	0.49	0.46	0.32	0.29

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	7380	6683	6308	6190	6308	6683	7380
50.0	8110	7279	6838	6700	6838	7279	8110
55.0	8832	7856	7345	7186	7345	7856	8832
60.0	9620	8477	7887	7705	7887	8477	9620
65.0	10529	9186	8505	8295	8505	9186	10529
70.0	11527	9952	9165	8924	9165	9952	11527
75.0	12594	10749	9842	9567	9842	10749	12594
80.0	13765	11599	10555	10241	10555	11599	13765
85.0	15065	12511	11306	10946	11306	12511	15065
90.0	16561	13522	12123	11710	12123	13522	16561

(cd/m²)

2022-06-02