



1 x 9290035851 A60-9 14W 120V 3000

1 x 1600 lm


Polar intensity diagram



Quantity estimation diagram

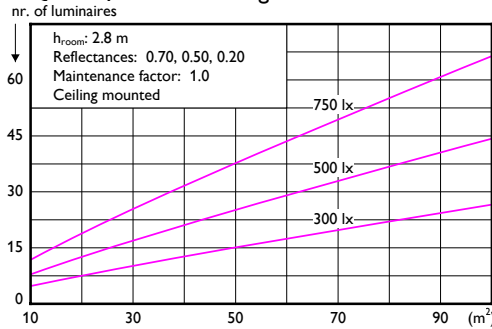

UGR diagram

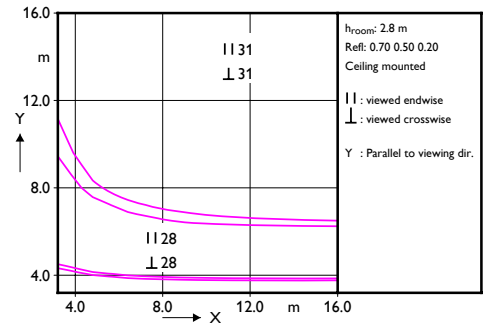

Light output ratio 0.97
Service upward 0.30
Service downward 0.67

CIE flux code 29 56 79 69 97

UGRcen (4Hx8H, 0.25H) 30

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)															
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.80	0.80	0.70	0.70	0.70
0.60	0.36	0.34	0.34	0.33	0.32	0.25	0.22	0.18	0.20	0.16	0.12	0.36	0.34	0.34	0.33	0.32
0.80	0.45	0.42	0.42	0.41	0.40	0.32	0.29	0.24	0.26	0.22	0.17	0.45	0.42	0.42	0.41	0.40
1.00	0.52	0.48	0.49	0.47	0.46	0.38	0.34	0.29	0.31	0.26	0.21	0.52	0.48	0.49	0.47	0.46
1.25	0.60	0.55	0.56	0.54	0.52	0.44	0.40	0.35	0.35	0.31	0.25	0.60	0.55	0.56	0.54	0.52
1.50	0.66	0.59	0.61	0.59	0.56	0.49	0.44	0.39	0.39	0.35	0.28	0.66	0.59	0.61	0.59	0.56
2.00	0.74	0.67	0.70	0.66	0.63	0.56	0.51	0.46	0.45	0.42	0.34	0.74	0.67	0.70	0.66	0.63
2.50	0.81	0.71	0.75	0.71	0.68	0.62	0.56	0.51	0.50	0.46	0.38	0.81	0.71	0.75	0.71	0.68
3.00	0.85	0.75	0.80	0.75	0.71	0.65	0.59	0.55	0.53	0.50	0.41	0.85	0.75	0.80	0.75	0.71
4.00	0.92	0.79	0.85	0.80	0.75	0.71	0.64	0.60	0.57	0.54	0.45	0.92	0.79	0.85	0.80	0.75
5.00	0.96	0.82	0.89	0.83	0.78	0.74	0.67	0.64	0.60	0.58	0.48	0.96	0.82	0.89	0.83	0.78

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	50027	44613	41521	40187	40391	42165	45810
50.0	49614	43770	40488	39086	39300	41169	45052
55.0	49429	43126	39647	38173	38397	40365	44496
60.0	49469	42664	38974	37425	37660	39732	44130
65.0	49668	42311	38397	36769	37015	39197	43880
70.0	50239	42231	38057	36337	36597	38905	43921
75.0	50963	42215	37755	35938	36212	38656	44040
80.0	52400	42693	37866	35922	36214	38835	44692
85.0	54218	43340	38082	35992	36305	39129	45547
90.0	56648	44268	38481	36215	36553	39624	46734

(cd/m²)

2022-11-03