



1 x 9290035795 A60-8 8W 120V 2700K

1 x 800 lm


Polar intensity diagram



Quantity estimation diagram

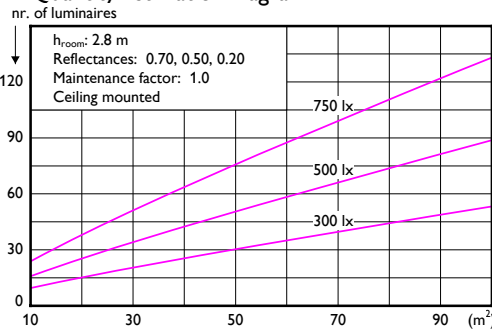

UGR diagram

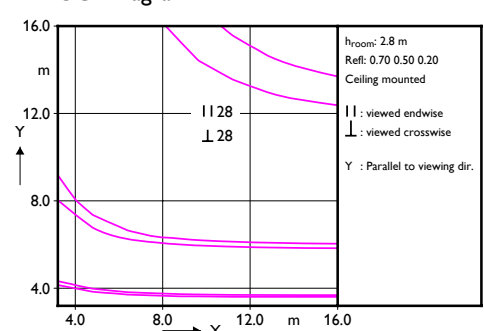

Light output ratio 0.99
Service upward 0.36
Service downward 0.63

CIE flux code 27 53 78 64 99

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.36	0.34	0.34	0.33	0.32	0.25	0.22	0.17	0.19	0.15	0.11	0.11
0.80	0.45	0.42	0.42	0.41	0.39	0.32	0.28	0.23	0.24	0.20	0.15	0.15
1.00	0.52	0.48	0.49	0.47	0.45	0.38	0.33	0.28	0.29	0.25	0.18	0.18
1.25	0.60	0.55	0.56	0.53	0.51	0.44	0.39	0.33	0.34	0.29	0.22	0.22
1.50	0.66	0.60	0.61	0.58	0.56	0.48	0.43	0.38	0.38	0.33	0.25	0.25
2.00	0.75	0.67	0.69	0.66	0.63	0.56	0.50	0.45	0.44	0.40	0.31	0.31
2.50	0.81	0.72	0.75	0.71	0.67	0.61	0.54	0.50	0.48	0.44	0.35	0.35
3.00	0.86	0.75	0.80	0.75	0.71	0.65	0.58	0.54	0.51	0.48	0.38	0.38
4.00	0.92	0.80	0.86	0.80	0.75	0.71	0.63	0.59	0.55	0.53	0.42	0.42
5.00	0.97	0.83	0.90	0.84	0.78	0.74	0.66	0.63	0.58	0.56	0.45	0.45

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	23536	21017	19576	18953	19048	19876	21575
50.0	23649	20892	19340	18676	18777	19662	21497
55.0	23870	20854	19186	18478	18586	19530	21510
60.0	24217	20913	19118	18363	18478	19487	21625
65.0	24695	21063	19127	18321	18443	19523	21839
70.0	25315	21304	19209	18346	18476	19635	22151
75.0	26144	21677	19397	18467	18607	19858	22610
80.0	27226	22199	19697	18689	18840	20199	23235
85.0	28600	22872	20102	19000	19165	20653	24034
90.0	30435	23784	20675	19457	19639	21289	25109

(cd/m²)

2022-11-03