



1 x 9290035796 A60-8 8W 120V 5000K

1 x 800 lm


Polar intensity diagram



Quantity estimation diagram

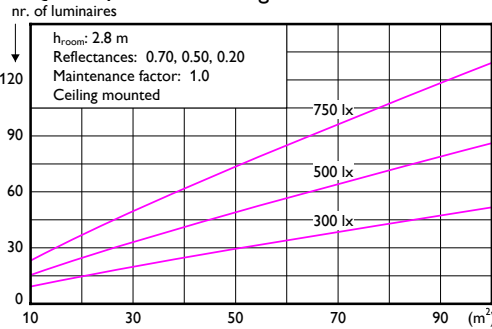

UGR diagram

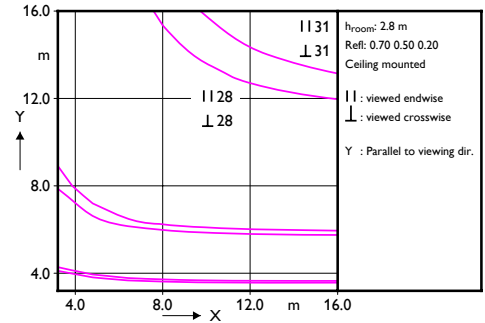

Light output ratio 1.02
Service upward 0.37
Service downward 0.65

CIE flux code 27 53 78 64 102

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.37	0.35	0.35	0.34	0.33	0.25	0.22	0.18	0.20	0.16	0.11	0.11
0.80	0.46	0.43	0.43	0.42	0.41	0.33	0.29	0.24	0.25	0.21	0.15	0.15
1.00	0.54	0.50	0.50	0.48	0.47	0.39	0.34	0.29	0.30	0.25	0.19	0.19
1.25	0.61	0.56	0.57	0.55	0.53	0.45	0.40	0.34	0.35	0.30	0.23	0.23
1.50	0.68	0.61	0.63	0.60	0.58	0.50	0.44	0.39	0.39	0.34	0.26	0.26
2.00	0.77	0.69	0.71	0.68	0.65	0.58	0.51	0.46	0.45	0.41	0.32	0.32
2.50	0.84	0.74	0.77	0.73	0.70	0.63	0.56	0.52	0.49	0.46	0.36	0.36
3.00	0.89	0.78	0.82	0.77	0.73	0.67	0.60	0.56	0.53	0.49	0.39	0.39
4.00	0.95	0.82	0.88	0.83	0.78	0.73	0.65	0.61	0.57	0.54	0.43	0.43
5.00	1.00	0.86	0.92	0.86	0.81	0.76	0.68	0.65	0.60	0.58	0.46	0.46

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	23875	21320	19857	19226	19322	20162	21885
50.0	24071	21264	19685	19009	19112	20013	21880
55.0	24363	21284	19582	18860	18970	19934	21954
60.0	24768	21388	19552	18781	18898	19930	22117
65.0	25410	21673	19681	18852	18977	20088	22471
70.0	25942	21832	19685	18800	18934	20122	22700
75.0	26881	22289	19944	18988	19132	20418	23248
80.0	28044	22866	20289	19250	19406	20806	23933
85.0	29627	23693	20823	19682	19853	21395	24897
90.0	31649	24733	21499	20233	20422	22138	26110

(cd/m²)

2022-11-03