



1 x 9290019011

1 x 750 lm


Polar intensity diagram



Quantity estimation diagram

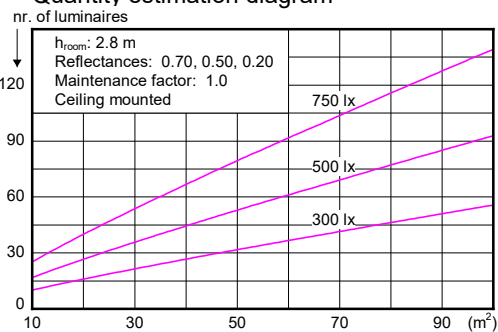

UGR diagram

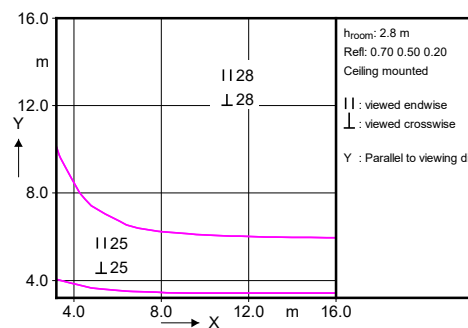

Utilisation factor table

Room Index	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane	0.0	15.0	30.0	45.0	60.0	75.0	90.0
Cone							
45.0	23613	23613	23613	23613	23613	23613	23613
50.0	22380	22380	22380	22380	22380	22380	22380
55.0	21253	21253	21253	21253	21253	21253	21253
60.0	20179	20179	20179	20179	20179	20179	20179
65.0	19155	19155	19155	19155	19155	19155	19155
70.0	18167	18167	18167	18167	18167	18167	18167
75.0	17222	17222	17222	17222	17222	17222	17222
80.0	16311	16311	16311	16311	16311	16311	16311
85.0	15464	15464	15464	15464	15464	15464	15464
90.0	14791	14791	14791	14791	14791	14791	14791

(cd/m²)

Light output ratio 1.00
Service upward 0.33
Service downward 0.67

CIE flux code 26 54 79 67 100

UGRcen (4Hx8H, 0.25H) 27

180203003G

2018-03-26