



1 x 9290023869 6500K 10W

1 x 700 lm


Polar intensity diagram



Quantity estimation diagram

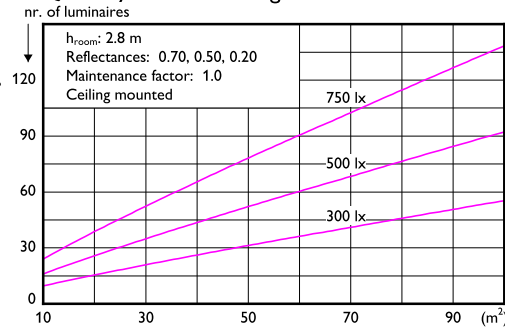

UGR diagram

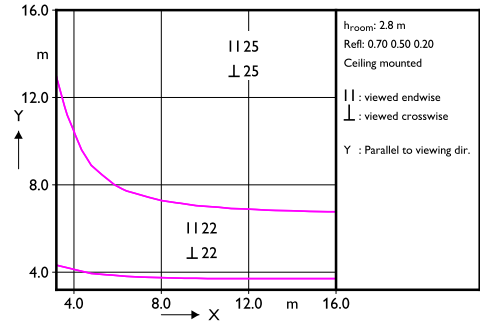

Light output ratio 1.00
Service upward 0.22
Service downward 0.78

CIE flux code 35 63 84 78 100

UGRcen (4Hx8H, 0.25H) 24

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.80	0.50	0.50	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.00	0.00
1.00	0.50	0.50	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.00	0.00
1.25	0.65	0.60	0.62	0.60	0.57	0.50	0.46	0.41	0.43	0.38	0.33	0.33
1.50	0.71	0.65	0.68	0.65	0.62	0.55	0.51	0.46	0.47	0.43	0.37	0.37
2.00	0.81	0.72	0.77	0.73	0.69	0.63	0.58	0.54	0.54	0.50	0.44	0.44
2.50	0.87	0.77	0.83	0.78	0.74	0.68	0.63	0.59	0.59	0.55	0.48	0.48
3.00	0.92	0.81	0.87	0.82	0.78	0.72	0.67	0.63	0.62	0.59	0.52	0.52
4.00	0.99	0.85	0.93	0.87	0.82	0.77	0.72	0.69	0.67	0.64	0.56	0.56
5.00	1.03	0.88	0.97	0.91	0.85	0.81	0.75	0.72	0.70	0.67	0.59	0.59

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	8171	7563	7226	7118	7226	7563	8171
50.0	7892	7244	6888	6775	6888	7244	7892
55.0	7624	6934	6561	6443	6561	6934	7624
60.0	7392	6658	6267	6144	6267	6658	7392
65.0	7179	6397	5988	5860	5988	6397	7179
70.0	7016	6178	5746	5612	5746	6178	7016
75.0	6912	6002	5543	5402	5543	6002	6912
80.0	6898	5893	5398	5248	5398	5893	6898
85.0	6979	5844	5302	5139	5302	5844	6979
90.0	7197	5876	5268	5089	5268	5876	7197

(cd/m²)

2020-06-22