



1 x 9290023126 6500K 12W

1 x 910 lm


Polar intensity diagram



Quantity estimation diagram

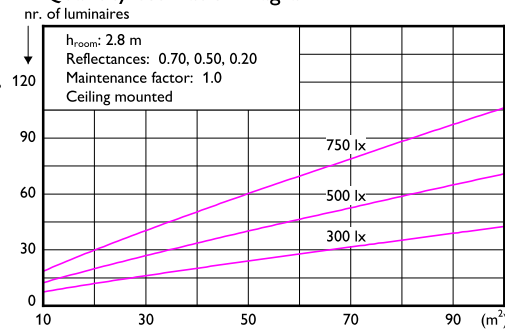

UGR diagram

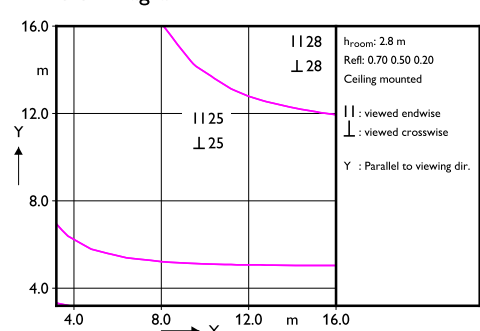

Light output ratio 1.00
Service upward 0.20
Service downward 0.80
CIE flux code 34 62 84 80 100
UGRcen (4Hx8H, 0.25H) 25

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	10898	10088	9638	9494	9638	10088	10898
50.0	10603	9732	9254	9101	9254	9732	10603
55.0	10306	9374	8869	8710	8869	9374	10306
60.0	10057	9058	8526	8359	8526	9058	10057
65.0	9797	8731	8171	7997	8171	8731	9797
70.0	9557	8415	7826	7644	7826	8415	9557
75.0	9393	8156	7533	7341	7533	8156	9393
80.0	9280	7928	7262	7060	7262	7928	9280
85.0	9272	7764	7044	6828	7044	7764	9272
90.0	9453	7719	6920	6685	6920	7719	9453

(cd/m²)

2020-06-22