



1 x 9290023128 6500K 14W

1 x 1310 lm


Polar intensity diagram



Quantity estimation diagram

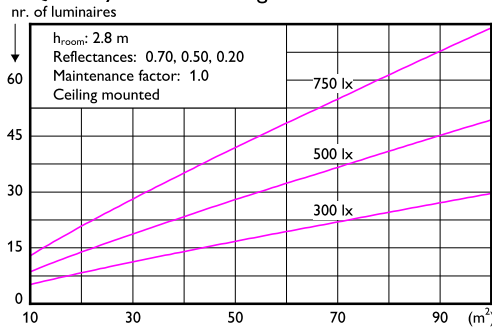

UGR diagram

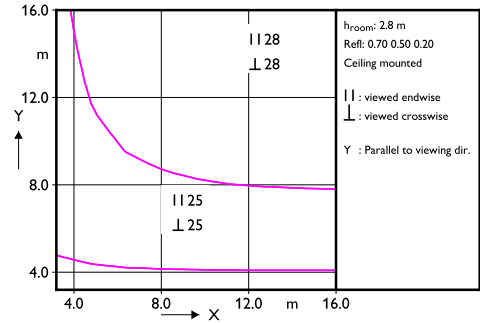

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.00
0.80	0.50	0.50	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.00	0.00
1.00	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
1.25	0.60	0.40	0.38	0.37	0.36	0.29	0.27	0.22	0.25	0.21	0.17	0.17
1.50	0.49	0.46	0.47	0.46	0.44	0.36	0.34	0.29	0.31	0.27	0.23	0.23
1.75	0.57	0.53	0.54	0.53	0.51	0.43	0.40	0.35	0.37	0.32	0.28	0.28
2.00	0.65	0.60	0.62	0.59	0.57	0.49	0.46	0.41	0.43	0.38	0.33	0.33
2.25	0.71	0.65	0.68	0.65	0.62	0.55	0.51	0.46	0.47	0.43	0.37	0.37
2.50	0.81	0.72	0.76	0.73	0.69	0.63	0.58	0.53	0.54	0.50	0.44	0.44
2.75	0.87	0.77	0.83	0.78	0.74	0.68	0.63	0.59	0.59	0.55	0.48	0.48
3.00	0.92	0.81	0.87	0.82	0.78	0.72	0.67	0.63	0.62	0.59	0.52	0.52
3.25	0.99	0.85	0.93	0.87	0.82	0.78	0.72	0.69	0.67	0.64	0.57	0.57
3.50	1.03	0.88	0.97	0.91	0.85	0.81	0.76	0.72	0.70	0.68	0.60	0.60

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	15467	14318	13679	13474	13679	14318	15467
50.0	15187	13939	13254	13036	13254	13939	15187
55.0	14756	13422	12700	12471	12700	13422	14756
60.0	14369	12943	12183	11943	12183	12943	14369
65.0	14021	12494	11694	11444	11694	12494	14021
70.0	13727	12086	11241	10980	11241	12086	13727
75.0	13477	11703	10809	10534	10809	11703	13477
80.0	13330	11387	10431	10141	10431	11387	13330
85.0	13351	11180	10144	9833	10144	11180	13351
90.0	13651	11146	9994	9653	9994	11146	13651

(cd/m²)

Light output ratio 1.00
Service upward 0.21
Service downward 0.79

CIE flux code 34 62 84 79 100

UGRcen (4Hx8H, 0.25H) 26

2020-06-22