



1 x 9290020039 6500K 14.5W

1 x 1800 lm


Polar intensity diagram



Quantity estimation diagram

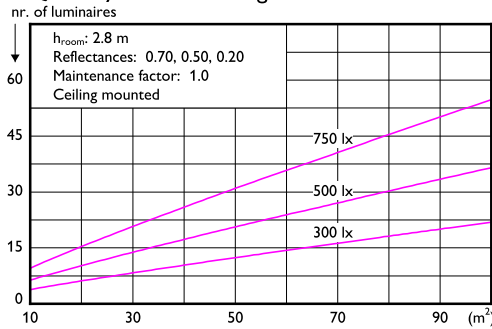

UGR diagram

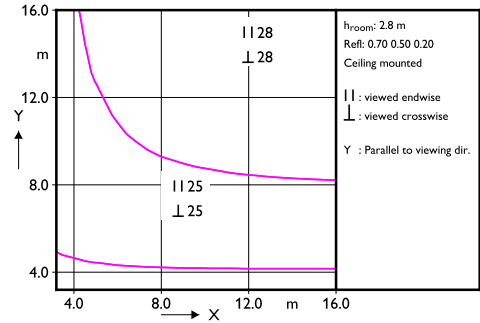

Light output ratio 0.97
Service upward 0.18
Service downward 0.79

CIE flux code 35 64 85 81 97

UGRcen (4Hx8H, 0.25H) 26

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80			0.70			0.50			0.30		
	0.80	0.50	0.30	0.80	0.50	0.30	0.80	0.50	0.30	0.80	0.50	0.30
0.60	0.39	0.37	0.37	0.36	0.36	0.28	0.26	0.22	0.25	0.21	0.18	0.18
0.80	0.48	0.45	0.46	0.45	0.44	0.36	0.34	0.29	0.32	0.27	0.23	0.23
1.00	0.56	0.52	0.54	0.52	0.50	0.42	0.40	0.35	0.37	0.33	0.28	0.28
1.25	0.64	0.59	0.61	0.59	0.56	0.49	0.46	0.41	0.43	0.38	0.33	0.33
1.50	0.70	0.63	0.67	0.64	0.61	0.54	0.51	0.46	0.47	0.43	0.38	0.38
2.00	0.79	0.71	0.75	0.72	0.68	0.62	0.58	0.53	0.54	0.50	0.44	0.44
2.50	0.86	0.76	0.81	0.77	0.73	0.67	0.63	0.59	0.59	0.55	0.49	0.49
3.00	0.90	0.79	0.86	0.81	0.76	0.71	0.67	0.63	0.62	0.59	0.52	0.52
4.00	0.97	0.84	0.91	0.86	0.81	0.76	0.71	0.68	0.67	0.64	0.57	0.57
5.00	1.01	0.86	0.95	0.89	0.83	0.80	0.75	0.72	0.70	0.67	0.60	0.60

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	14891	13834	13243	13053	13243	13834	14891
50.0	14408	13274	12647	12447	12647	13274	14408
55.0	13938	12725	12066	11856	12066	12725	13938
60.0	13535	12238	11543	11323	11543	12238	13535
65.0	13128	11743	11013	10784	11013	11743	13128
70.0	12780	11293	10523	10284	10523	11293	12780
75.0	12516	10904	10087	9836	10087	10904	12516
80.0	12386	10610	9732	9465	9732	10610	12386
85.0	12454	10447	9486	9198	9486	10447	12454
90.0	12803	10454	9372	9053	9372	10454	12803

(cd/m²)

2020-10-21