



1 x 9290022988 6500K 5W E27A60

1 x 540 lm


Polar intensity diagram



Quantity estimation diagram

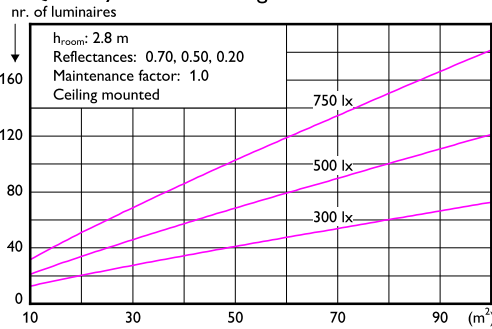

UGR diagram

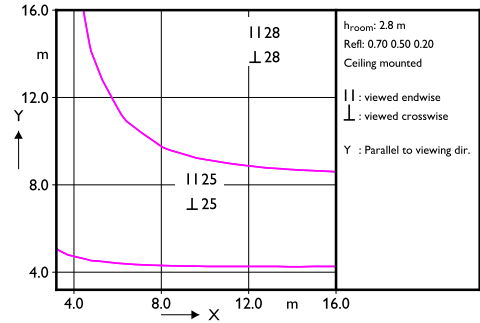

Light output ratio 1.00
Service upward 0.24
Service downward 0.76

CIE flux code 34 62 83 76 100

UGRcen (4Hx8H, 0.25H) 26

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)									
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30
0.60	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.00
0.80	0.39	0.37	0.37	0.37	0.36	0.28	0.26	0.21	0.24	0.16
1.00	0.49	0.46	0.46	0.45	0.44	0.36	0.33	0.28	0.31	0.26
1.25	0.57	0.53	0.54	0.52	0.50	0.42	0.39	0.34	0.36	0.32
1.50	0.65	0.59	0.61	0.59	0.57	0.49	0.45	0.40	0.42	0.37
2.00	0.71	0.64	0.67	0.64	0.61	0.54	0.50	0.45	0.46	0.42
2.50	0.80	0.72	0.76	0.72	0.68	0.62	0.57	0.52	0.53	0.49
3.00	0.87	0.76	0.82	0.77	0.73	0.67	0.62	0.58	0.57	0.54
4.00	0.91	0.80	0.86	0.81	0.77	0.71	0.66	0.62	0.61	0.57
5.00	0.98	0.85	0.92	0.86	0.81	0.76	0.71	0.67	0.65	0.62
	1.02	0.88	0.96	0.90	0.84	0.80	0.74	0.71	0.68	0.66

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	16938	15368	14522	14255	14522	15368	16938
50.0	16179	14550	13683	13411	13683	14550	16179
55.0	15461	13778	12896	12620	12896	13778	15461
60.0	14752	13023	12129	11852	12129	13023	14752
65.0	14088	12314	11410	11132	11410	12314	14088
70.0	13549	11717	10798	10517	10798	11717	13549
75.0	13070	11170	10235	9951	10235	11170	13070
80.0	12733	10741	9779	9489	9779	10741	12733
85.0	12509	10395	9397	9099	9397	10395	12509
90.0	12433	10152	9102	8792	9102	10152	12433

(cd/m²)

2019-12-26