



1 x 9290022994 6500K 9W E27A60

1 x 950 lm


Polar intensity diagram



Quantity estimation diagram

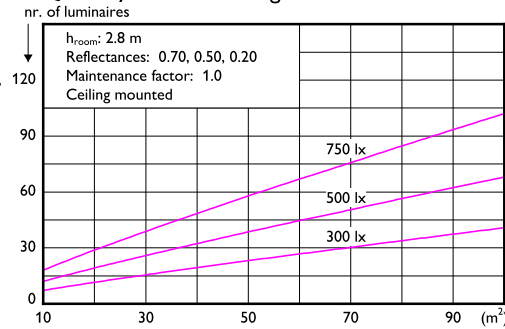

UGR diagram

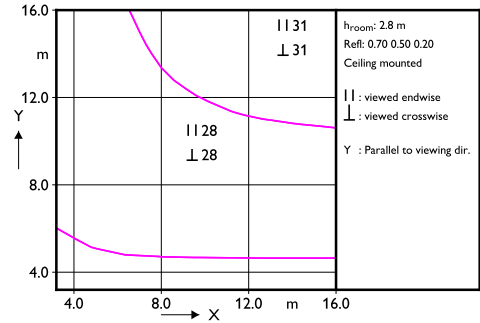

Light output ratio 1.00
Service upward 0.20
Service downward 0.80

CIE flux code 33 62 84 80 100

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80			0.70			0.50			0.30		
	0.80	0.50	0.30	0.80	0.50	0.30	0.80	0.50	0.30	0.80	0.50	0.30
0.60	0.39	0.37	0.37	0.36	0.36	0.28	0.26	0.21	0.24	0.20	0.17	0.17
0.80	0.49	0.46	0.47	0.45	0.44	0.36	0.33	0.28	0.31	0.27	0.22	0.22
1.00	0.57	0.53	0.54	0.52	0.51	0.42	0.40	0.34	0.37	0.32	0.28	0.28
1.25	0.65	0.59	0.62	0.59	0.57	0.49	0.46	0.40	0.43	0.38	0.33	0.33
1.50	0.71	0.64	0.67	0.65	0.62	0.54	0.51	0.45	0.47	0.43	0.37	0.37
2.00	0.81	0.72	0.76	0.73	0.69	0.62	0.58	0.53	0.54	0.50	0.44	0.44
2.50	0.87	0.77	0.83	0.78	0.74	0.68	0.63	0.59	0.59	0.55	0.49	0.49
3.00	0.92	0.81	0.87	0.82	0.78	0.72	0.67	0.63	0.63	0.59	0.52	0.52
4.00	0.99	0.85	0.93	0.87	0.82	0.78	0.72	0.69	0.67	0.65	0.57	0.57
5.00	1.03	0.88	0.97	0.91	0.85	0.81	0.76	0.73	0.71	0.68	0.60	0.60

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	30853	28046	26528	26047	26528	28046	30853
50.0	29775	26826	25254	24759	25254	26826	29775
55.0	28597	25531	23919	23415	23919	25531	28597
60.0	27406	24237	22594	22084	22594	24237	27406
65.0	26255	22986	21318	20803	21318	22986	26255
70.0	25156	21786	20094	19576	20094	21786	25156
75.0	24051	20582	18871	18351	18871	20582	24051
80.0	23077	19486	17750	17226	17750	19486	23077
85.0	22275	18521	16747	16217	16747	18521	22275
90.0	21643	17671	15844	15304	15844	17671	21643

(cd/m²)

2019-12-26