



1 x 9290037612 6.5W 6500K**1 x 800 lm**


Polar intensity diagram



Quantity estimation diagram

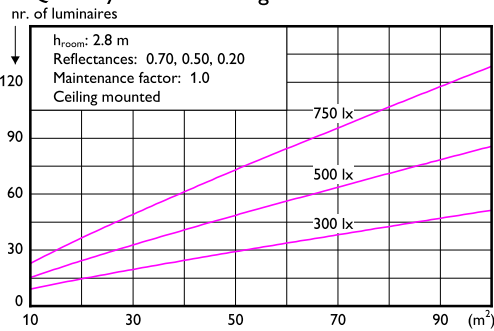

UGR diagram

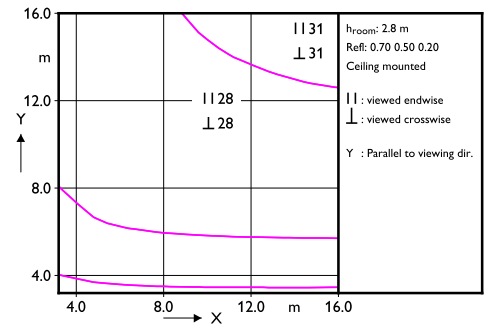

Light output ratio 1.00
Service upward 0.30
Service downward 0.70

CIE flux code 29 56 79 70 100

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.37	0.35	0.35	0.34	0.33	0.26	0.23	0.19	0.21	0.17	0.13	0.13
0.80	0.46	0.43	0.44	0.42	0.41	0.33	0.30	0.25	0.27	0.22	0.17	0.17
1.00	0.54	0.50	0.51	0.49	0.47	0.39	0.35	0.30	0.32	0.27	0.21	0.21
1.25	0.62	0.56	0.58	0.55	0.53	0.46	0.41	0.36	0.37	0.32	0.26	0.26
1.50	0.68	0.61	0.63	0.61	0.58	0.51	0.46	0.40	0.41	0.37	0.29	0.29
2.00	0.77	0.69	0.72	0.68	0.65	0.58	0.53	0.48	0.47	0.43	0.35	0.35
2.50	0.83	0.74	0.78	0.74	0.70	0.64	0.57	0.53	0.52	0.48	0.39	0.39
3.00	0.88	0.77	0.82	0.78	0.73	0.68	0.61	0.57	0.55	0.52	0.43	0.43
4.00	0.95	0.82	0.88	0.83	0.78	0.73	0.66	0.62	0.60	0.57	0.47	0.47
5.00	0.99	0.85	0.92	0.86	0.81	0.77	0.69	0.66	0.63	0.60	0.50	0.50

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	22309	20372	19318	18982	19318	20372	22309
50.0	22184	20079	18949	18592	18949	20079	22184
55.0	22140	19857	18648	18269	18648	19857	22140
60.0	22172	19695	18403	18000	18403	19695	22172
65.0	22294	19601	18218	17790	18218	19601	22294
70.0	22527	19585	18100	17643	18100	19585	22527
75.0	22886	19652	18048	17560	18048	19652	22886
80.0	23426	19832	18088	17561	18088	19832	23426
85.0	24179	20136	18221	17648	18221	20136	24179
90.0	25267	20630	18496	17866	18496	20630	25267

(cd/m²)

2023-10-17