



1 x 9290024002 8W A60 6500K

1 x 850 lm


Polar intensity diagram



Quantity estimation diagram

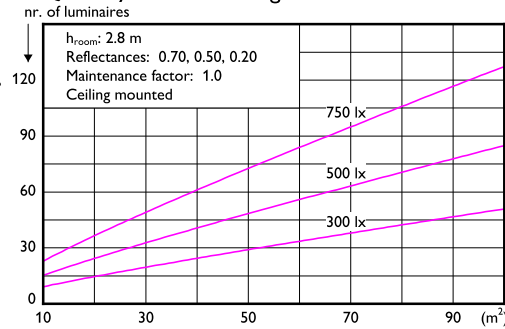

UGR diagram

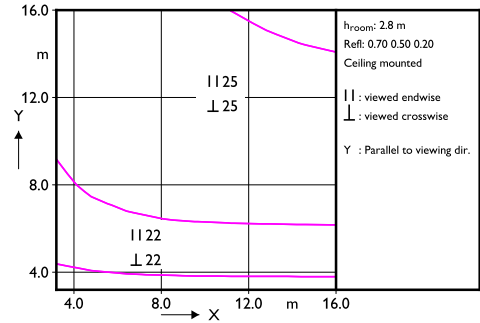

Light output ratio 1.00
Service upward 0.39
Service downward 0.61

CIE flux code 24 49 75 61 100

UGRcen (4Hx8H, 0.25H) 24

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.10	0.00
0.80	0.50	0.50	0.30	0.20	0.10	0.10	0.30	0.10	0.10	0.10	0.10	0.00
1.00	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.00
1.25	0.35	0.33	0.33	0.32	0.31	0.24	0.21	0.16	0.18	0.14	0.09	
1.50	0.44	0.41	0.41	0.40	0.39	0.31	0.27	0.22	0.23	0.19	0.13	
1.75	0.51	0.48	0.48	0.46	0.44	0.36	0.32	0.27	0.27	0.23	0.16	
2.00	0.59	0.54	0.54	0.52	0.50	0.42	0.37	0.32	0.32	0.27	0.20	
2.50	0.65	0.59	0.60	0.57	0.55	0.47	0.41	0.36	0.35	0.31	0.23	
3.00	0.74	0.66	0.68	0.65	0.62	0.55	0.48	0.43	0.41	0.37	0.28	
3.50	0.80	0.71	0.74	0.70	0.66	0.60	0.53	0.48	0.45	0.42	0.31	
4.00	0.85	0.75	0.78	0.74	0.70	0.64	0.56	0.52	0.49	0.45	0.34	
4.50	0.92	0.79	0.85	0.79	0.75	0.69	0.61	0.57	0.53	0.50	0.39	
5.00	0.96	0.83	0.89	0.83	0.78	0.73	0.64	0.61	0.56	0.53	0.41	

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	10051	8753	8096	7894	8096	8753	10051
50.0	9934	8587	7913	7706	7913	8587	9934
55.0	9863	8466	7773	7562	7773	8466	9863
60.0	9839	8387	7675	7459	7675	8387	9839
65.0	9852	8341	7607	7386	7607	8341	9852
70.0	9882	8310	7555	7327	7555	8310	9882
75.0	9934	8297	7517	7284	7517	8297	9934
80.0	10004	8296	7491	7251	7491	8296	10004
85.0	10092	8306	7474	7227	7474	8306	10092
90.0	10198	8326	7465	7211	7465	8326	10198

(cd/m²)

2020-01-19