



1 x 9290020586 8W A60 6500K

1 x 806 lm


Polar intensity diagram



Quantity estimation diagram

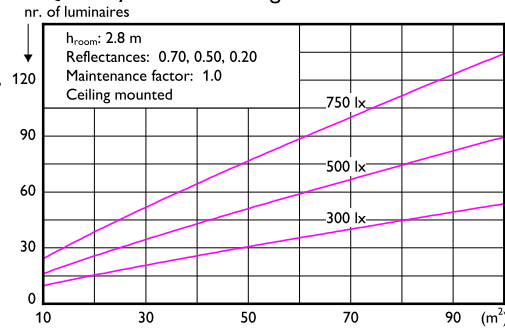

UGR diagram

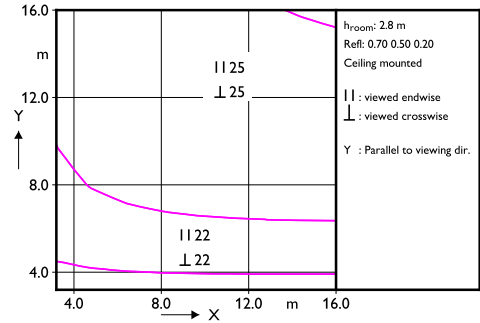

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
0.80	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
1.00	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
1.25	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
1.50	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
2.00	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
2.50	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
3.00	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
4.00	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00
5.00	0.80	0.80	0.70	0.70	0.70	0.70	0.30	0.10	0.30	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	9530	8300	7677	7485	7677	8300	9530
50.0	9419	8143	7503	7308	7503	8143	9419
55.0	9352	8027	7371	7171	7371	8027	9352
60.0	9330	7953	7278	7073	7278	7953	9330
65.0	9341	7909	7213	7003	7213	7909	9341
70.0	9371	7880	7163	6948	7163	7880	9371
75.0	9420	7867	7128	6907	7128	7867	9420
80.0	9486	7866	7103	6876	7103	7866	9486
85.0	9569	7876	7087	6853	7087	7876	9569
90.0	9670	7895	7079	6837	7079	7895	9670

(cd/m²)

Light output ratio 1.00
Service upward 0.39
Service downward 0.61

CIE flux code 24 49 75 61 100

UGRcen (4Hx8H, 0.25H) 24

2019-06-12