


1 x 9290035322 11W 220V 4000K

1 x 1018 lm


Polar intensity diagram



Light output ratio 1.02
Service upward 0.23
Service downward 0.79

CIE flux code 33 61 83 77 102

Quantity estimation diagram

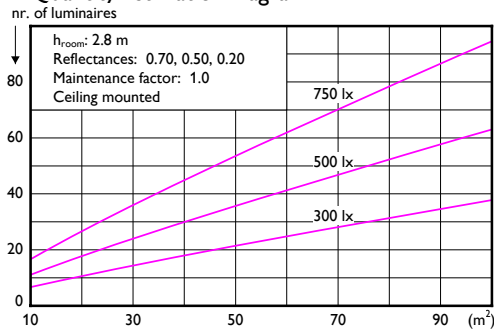

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.50	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.40	0.38	0.38	0.37	0.36	0.28	0.26	0.22	0.24	0.20	0.17	0.17
1.00	0.49	0.46	0.47	0.46	0.44	0.36	0.34	0.28	0.31	0.26	0.22	0.22
1.25	0.57	0.53	0.55	0.53	0.51	0.43	0.40	0.34	0.37	0.32	0.27	0.27
1.50	0.65	0.60	0.62	0.60	0.57	0.50	0.46	0.40	0.42	0.38	0.32	0.32
2.00	0.72	0.65	0.68	0.65	0.62	0.55	0.51	0.45	0.47	0.42	0.36	0.36
2.50	0.81	0.73	0.77	0.73	0.70	0.63	0.58	0.53	0.54	0.49	0.43	0.43
3.00	0.88	0.78	0.83	0.79	0.75	0.68	0.63	0.59	0.58	0.55	0.47	0.47
4.00	0.93	0.81	0.88	0.83	0.78	0.73	0.67	0.63	0.62	0.59	0.51	0.51
5.00	1.00	0.86	0.94	0.88	0.83	0.78	0.72	0.69	0.67	0.64	0.56	0.56
5.00	1.04	0.89	0.98	0.92	0.86	0.82	0.76	0.72	0.70	0.67	0.59	0.59

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0							
50.0							
55.0							
60.0	Cannot draw luminance table: the apparent area equals zero.						
65.0							
70.0							
75.0							
80.0							
85.0							
90.0							

(cd/m²)

2022-05-25