



1 x 9290035323 11W 220V 6500K

1 x 1018 lm


Polar intensity diagram



Quantity estimation diagram

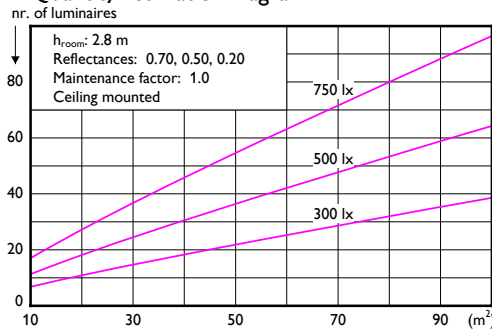

UGR diagram

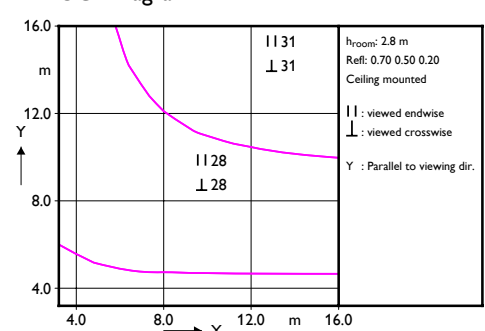

Light output ratio 1.01
Service upward 0.24
Service downward 0.77

CIE flux code 32 60 82 76 101

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.39	0.37	0.37	0.36	0.35	0.28	0.25	0.21	0.24	0.19	0.16	0.16
0.80	0.48	0.45	0.46	0.45	0.43	0.35	0.33	0.27	0.30	0.25	0.21	0.21
1.00	0.56	0.52	0.53	0.52	0.50	0.42	0.39	0.33	0.35	0.31	0.26	0.26
1.25	0.64	0.59	0.61	0.58	0.56	0.48	0.45	0.39	0.41	0.36	0.31	0.31
1.50	0.70	0.64	0.67	0.64	0.61	0.53	0.49	0.44	0.45	0.41	0.34	0.34
2.00	0.80	0.71	0.75	0.72	0.68	0.61	0.57	0.52	0.52	0.48	0.41	0.41
2.50	0.87	0.76	0.82	0.77	0.73	0.67	0.62	0.57	0.57	0.53	0.46	0.46
3.00	0.91	0.80	0.86	0.81	0.77	0.71	0.66	0.61	0.60	0.57	0.49	0.49
4.00	0.98	0.85	0.92	0.86	0.81	0.76	0.71	0.67	0.65	0.62	0.54	0.54
5.00	1.02	0.88	0.96	0.90	0.84	0.80	0.74	0.71	0.68	0.65	0.57	0.57

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	31566	28655	27085	26588	27085	28655	31566
50.0	30620	27550	25917	25403	25917	27550	30620
55.0	29666	26451	24763	24236	24763	26451	29666
60.0	28802	25439	23699	23159	23699	25439	28802
65.0	27889	24387	22603	22053	22603	24387	27889
70.0	27125	23466	21632	21070	21632	23466	27125
75.0	26441	22606	20717	20143	20717	22606	26441
80.0	25880	21837	19884	19295	19884	21837	25880
85.0	25531	21220	19183	18575	19183	21220	25531
90.0	25354	20701	18560	17928	18560	20701	25354

(cd/m²)

2022-05-25