



1 x 9290030118 2200-2700K 10.5W

1 x 1521 lm


Polar intensity diagram



Quantity estimation diagram

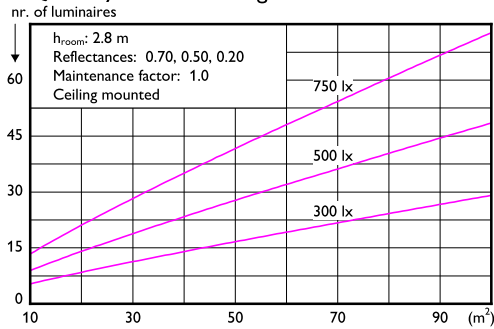

UGR diagram

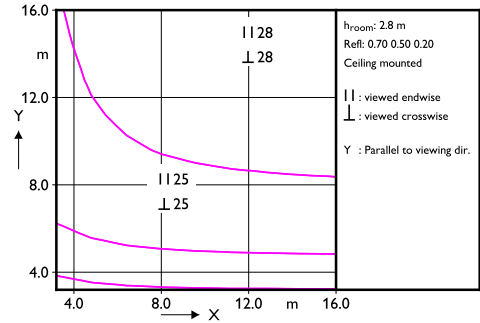

Light output ratio 1.01
Service upward 0.44
Service downward 0.57

CIE flux code 19 45 72 56 101

UGRcen (4Hx8H, 0.25H) 26

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	10587	9796	9357	9216	9357	9796	10587
50.0	11362	10424	9909	9745	9909	10424	11362
55.0	12144	11041	10444	10255	10444	11041	12144
60.0	12962	11669	10981	10765	10981	11669	12962
65.0	13900	12381	11585	11337	11585	12381	13900
70.0	15050	13245	12316	12028	12316	13245	15050
75.0	16508	14329	13231	12894	13231	14329	16508
80.0	18298	15626	14313	13914	14313	15626	18298
85.0	20578	17228	15629	15150	15629	17228	20578
90.0	23575	19249	17258	16670	17258	19249	23575

(cd/m²)

2021-07-01